



United Technologies

S E L E C T I O N P R O D U I T



- **Multi Tiering:** Entry and premium efficiency
- Available for cooling (30XW) or heating (30XWH) operation
- Wide operating envelope: down to -12°C chilled liquid temperature, up to +63°C hot water temperature
- **Compactness:** less than 1.2 m width up to 1600 kW

Water-Cooled Screw Chillers
Water-sourced screw heat pumps

30XW/30XW-P
30XWH/30XWHP



CARRIER participates in the ECP programme for LCP/HP
Check ongoing validity of certificate:
www.eurovent-certification.com
www.certiflash.com



AQUAFORCE®

CONTENTS

Introduction.....	3
Customer Benefits	3
Technical insights	4
Options.....	6
Physical data, standard units	7
Electrical data, standard units	9
Physical data, units for high condensing temperatures	10
Electrical data, units for high condensing temperatures.....	12
Physical data, low-temperature units.....	13
Electrical data, low-temperature units	13
Part load performances	14
Sound spectrum	15
Operating limits and operating ranges.....	17
Evaporator pressure drop curves.....	18
Condenser pressure drop curves.....	18
Dimensions/clearances.....	19
Specification Guide	22

30XW- 30XWH

Nominal cooling capacity 273-1756 kW
Nominal heating capacity 317-1989 kW

Introduction

The 30XW liquid chillers are the premium solution for industrial and commercial applications where installers, consultants and building owners require optimal performances and maximum quality.

The 30XW liquid chillers are designed to meet current and future requirements in terms of energy efficiency, flexibility of use and compactness. They use the most reliable technologies available today:

- Twin-rotor screw compressors with a variable capacity valve
- Refrigerant R134a
- Touch Pilot control system
- Flooded heat exchangers that are mechanically cleanable

To meet to all environmental and economic requirements, the 30XW is available in two efficiency classes:

- Entry-level efficiency 30XW units that offer an optimised balance of technical and economical aspects,
- Premium-efficiency 30XW-P units that offer unequalled energy efficiency to satisfy the most stringent demands of building owners wanting to reduce operating costs to the minimum.

The 30XW Aquaforce range is also split into two versions:

- 30XW for air conditioning and refrigeration applications
- 30XWH for heating applications

As standard, the unit can provide an evaporator leaving temperature down to 3,3°C (-12°C optional), and when operating as a heat pump, it can deliver up to 50°C (63°C optional) on the condenser side.

Customer Benefits

Low energy consumption

- Eurovent energy efficiency class "A"
- EER of up to 5,9 and ESEER up to 6,8
- GROSS-EER up to 6,1 and GROSS-ESEER up to 7,9
- The high energy efficiency is reached through:
 - Twin-rotor screw compressor equipped with a high-efficiency motor and a variable capacity valve that permits exact matching of the cooling capacity to the load.
 - Flooded multi-pipe heat exchangers for increased heat exchange efficiency.
 - Electronic expansion device permitting operation at a lower condensing pressure and improved utilisation of the evaporator heat exchange surface.
 - Economizer system with electronic expansion device for increased cooling capacity (30XW-P).


Low operating sound levels

- Standard unit features include:
 - Silencers on the compressors discharge line.
 - Silencers on the economiser return line.
 - Acoustic insulation on the components that are most subjected to radiated noise.
 - Option 257 further reduces the global unit sound level.

Easy and fast installation

- Compact design
 - The 30XW units are designed to offer the most compact dimensions on the market.
 - With a width of approximately 1 m up to 1600 kW the units can pass through standard door openings and only require minimum floor space in the plant room.

Compact, accessible unit - side view - sizes up to 1600 KW

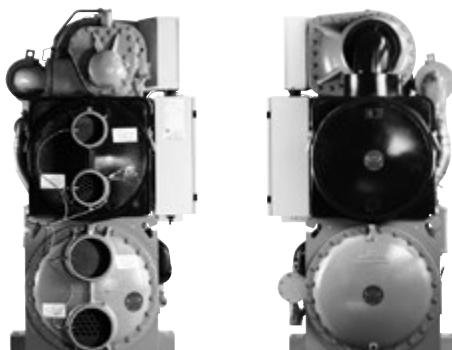

- Simplified electrical connections
 - Main disconnect switch with high trip capacity
 - Transformer to supply the integrated control circuit (400/24 V)
- Simplified hydronic connections
 - Victaulic connections on the evaporator and condenser
 - Practical reference marks for entering and leaving water connections
 - Possibility to reverse the heat exchanger water inlet and outlet at the factory
 - Possibility to modify the number of heat exchanger passes
- Fast commissioning
 - Systematic factory operation test before shipment
 - Quick-test function for step-by-step verification of the instruments, expansion devices and compressors.

Environmental care

- R-134a refrigerant
 - HFC refrigerant with zero ozone depletion potential
- Leak-tight refrigerant circuit
 - Reduction of leaks as no capillary tubes and flare connections are used
 - Verification of pressure transducers and temperature sensors without transferring refrigerant charge
 - Discharge line shut-off valve and liquid line service valve for simplified maintenance.

High reliability and easy servicing

- The 30XW units offer increased global performance as well as Carrier's acclaimed product quality and reliability.
- Major components are selected and tested to minimize failures possibility, as well as many design choices have been taken in this perspective.
- Screw compressors
 - Industrial-type screw compressors with oversized bearings and motor cooled by suction gas.
 - All compressor components are easily accessible on site minimising down-time.
- Refrigerant circuit
 - Two independent refrigerant circuits (from 1000 kW upwards); the second one automatically takes over, if the first one develops a fault, maintaining partial cooling under all circumstances.
- Evaporator
 - Electronic paddle-free flow switch. Auto-setting according to cooler size and fluid type.
- Auto-adaptive control
 - Control algorithm prevents excessive compressor cycling (Carrier patent)
 - Automatic compressor unloading in case of abnormally high condensing pressure.
- Exceptional endurance tests
 - Partnerships with specialised laboratories and use of limit simulation tools (finite element calculation) for the design of critical components.
 - Transport simulation test in the laboratory on a vibrating table and then on an endurance circuit (based on a military standard).

Technical insights

Touch Pilot Control

Touch Pilot control, 5" user interface



- New innovative smart control features:
 - An intuitive and user-friendly, coloured, 5" interface (7" optional)
 - Direct access to the unit's technical drawings and the main service documents
 - Screen-shots with concise and clear information in local languages
 - Complete menu, customised for different users (end user, service personnel and Carrier-factory technicians)
 - Easy access to the controller box with inclined touch screen mounting to ensure legibility under any lighting conditions
 - Safe operation and unit setting: password protection ensures that unauthorised people cannot modify any advanced parameters
 - Simple and "smart" intelligence uses data collection from the constant monitoring of all machine parameters to optimise unit operation.
- Energy management:
 - Internal time schedule clock controls chiller on/off times and operation at a second set-point
 - The DCT (Data Collection Tool) records the alarms history to simplify and facilitate service operations.

Remote Management (Standard)

- Units with Touch Pilot control can be easily accessed from the internet, using a PC with an Ethernet connection. This makes remote control quick and easy and offers significant advantages for service operations.
- The 30XW also communicates with other building management systems via optional communication gateways.
- The 30XW is equipped with an RS485 serial port that offers multiple remote control, monitoring and diagnostic possibilities. Carrier offers a vast choice of control products, specially designed to control, manage and supervise the operation of an air conditioning system. Please consult your Carrier representative for more information.

- The following commands/visualisations are possible from remote connection:

- Condenser pumps control: a digital input allows verification of condenser water flow (the flow switch must be supplied by the installer)
- Start/stop of the machine
- Dual set-point management: through a dedicated contact is possible to activate a second set-point (example: unoccupied mode)
- Demand limit setting: to limit the maximum chiller capacity to a predefined value
- Operation visualization: indication if the unit is operating or if it's in stand-by (no cooling load)
- alarm visualization.

Remote management (EMM option)

- The Energy Management Module offers extended remote control possibilities:
 - Room temperature: permits set-point reset based on the building indoor air temperature (with Carrier thermostat)
 - Set point reset: ensures reset of the cooling set-point based on a 4-20 mA or 0-10 V signal
 - Demand limit: permits limitation of the maximum chiller power or current based on a 0-10 V signal
 - Demand limit 1 and 2: closing of these contacts limits the maximum chiller power or current to two predefined values
 - User safety: this contact can be used for any customer safety loop; opening of the contact generates a specific alarm
 - Ice storage end: when ice storage has finished, this input permits return to the second set-point (unoccupied mode)
 - Time schedule override: closing of this contact cancels the time schedule effects
 - Out of service: this signal indicates that the chiller is completely out of service
 - Chiller capacity: this analogue output (0-10 V) gives an immediate indication of the chiller capacity
 - Alert indication: this volt-free contact indicates the necessity to carry out a maintenance operation or the presence of a minor fault.

06T screw compressor



The new generation of the Carrier 06T screw compressors benefits from Carrier's long experience in the development of twin-rotor screw compressors. The compressor is equipped with bearings with oversized rollers, oil pressure lubricated for reliable and durable operation, even at maximum load.

A variable control valve controlled by the oil pressure permits infinitely variable cooling capacity. This system allows optimal adjustment of the compressor cooling capacity and ensures exceptionally high stability of the chilled water leaving temperature.

Among the other advantages: if a fault occurs e.g. if the condenser is fouled or at very high water temperature, the compressor does not switch off, but continues operation with a reduced capacity (unloaded mode).

The silencer in the discharge line considerably reduces discharge gas pulsations for much quieter operation.

The condenser includes an oil separator that minimises the amount of oil in circulation in the refrigerant circuit and re-directs it to the compressor function.

Options

Options	No.	Description	Advantages	Use for 30XW range
Medium-temperature brine solution	5	Implementation of new algorithms of control and evaporator redesign to allow chilled brine solution production down to -6°C when ethylene glycol is used (-3°C with propylene glycol)	Covers specific applications such as ice storage and industrial processes	Only sizes 512/562/1012/1154
Low-temperature brine solution	6	Implementation of new algorithms of control and evaporator redesign to allow chilled brine solution production down to -12°C when ethylene glycol is used (-8°C with propylene glycol)	Covers specific applications such as ice storage and industrial processes	Only sizes 512/562/1012/1154
Light-brine solution, down to -3°C	8	Implementation of new algorithms of control to allow chilled brine solution production down to -3°C when ethylene glycol is used (0°C with propylene glycol)	Matches with most application requirements for ground-sourced heat pumps and fits with many industrial processes requirements	254-1762
Unit supplied in two assembled parts	51	The unit is equipped with flanges that allow disassembly of the unit on site	Facilitates installation in plant rooms with limited access	Only sizes 1612/1652/1702/1762
Master/slave operation	58	Unit equipped with supplementary water outlet temperature sensor kit to be field-installed allowing master/slave operation of two units connected in parallel	Optimised operation of two chillers connected in parallel with operating time equalisation	254-1762
Single power connection point	81	Unit power connection via one main supply connection	Quick and easy installation	1002-1762
No disconnect switch, but short circuit protection	82A	Unit without disconnect switch, but with short-circuit protection device	Permits an external electrical disconnect system for the unit (field-supplied), while ensuring unit short circuit protection	254-1762
Evaporator pump electrical power / control circuit	84	Unit equipped with an electrical power and control circuit for one pump evaporator side	Quick and easy installation: the control of fixed speed pumps is embedded in the unit control	254-1252, 1314
Evaporator dual pumps electrical power / control circuit	84D	Unit equipped with an electrical power and control circuit for two pumps evaporator side	Quick and easy installation: the control of fixed speed pumps is embedded in the unit control	254-1252, 1314
Condenser pump electrical power / control circuit	84R	Unit equipped with an electrical power and control circuit for one pump condenser side	Quick and easy installation: the control of fixed speed pumps is embedded in the unit control	254-1252, 1314
Condenser insulation	86	Thermal condenser insulation	Minimizes thermal dispersions condenser side (key option for heat pump or heat recovery applications) and allows compliancy with special installation criteria (hot parts insulated)	254-1762
Service valve set	92	Liquid line valve (evaporator inlet) and compressor suction line valve	Allow isolation of various refrigerant circuit components for simplified service and maintenance	254-1762
Evaporator with one pass	100C	Evaporator with one pass on the water side. Evaporator inlet and outlet on opposite sides.	Easy to install, depending on site. Reduced pressure drops	254-1762
Condenser with one pass	102C	Condenser with one pass on the water side. Condenser inlet and outlet on opposite sides.	Easy to install, depending on site. Reduced pressure drops	254-1762
21 bar evaporator	104	Reinforced evaporator for extension of the maximum water-side service pressure to 21 bar (standard 10 bar)	Covers applications with a high water column evaporator side (typically high buildings)	254-1762
21 bar condenser	104A	Reinforced condenser for extension of the maximum water-side service pressure to 21 bar (standard 10 bar)	Covers applications with a high water column condenser side (typically high buildings)	254-1762
Reversed evaporator water connections	107	Evaporator with reversed water inlet/outlet	Easy installation on sites with specific requirements	254-1762
Reversed condenser water connections	107A	Condenser with reversed water inlet/outlet	Easy installation on sites with specific requirements	254-1762
JBus gateway	148B	Two-directional communication board complying with JBus protocol	Connects the unit by communication bus to a building management system	254-1762
LON gateway	148D	Two-directional communication board complying with Lon Talk protocol	Connects the unit by communication bus to a building management system	254-1762
Bacnet over IP gateway	149	Two-directional high-speed communication using BACnet protocol over Ethernet network (IP)	Easy and high-speed connection by ethernet line to a building management system. Allows access to multiple unit parameters	254-1762
High condensing temperature	150	Optimized compressor for operation at high condensing temperature	Increased condenser leaving water temperature up to 63°C. Allows applications with high condensing temperature (heat pumps, installations with not generously sized dry-coolers or more generally, installations with dry-coolers in hot climate). NOTE: to ensure control of the condenser leaving water temperature this option must be fitted with 30XWH units.	254-1762
Condensing temperature limitation	150B	Limitation of the maximum condenser leaving water temperature to 45°C	Reduced maximum power input and current absorption: power cables and protection elements can therefore be downsized	254-1762
Control for low condensing temperature systems	152	Output signal (0-10 V) to control the condenser water inlet valve	Simple installation: for applications with cold water at condenser inlet (ex. ground-source, groundwater-source, superficial water-source applications) the signal permits to control a 2 or 3-way valve to maintain condenser water temperature (and so condensing pressure) at acceptable values	254-1762
Energy Management Module EMM	156	Control board with additional inputs/outputs. See Energy Management Module option chapter	Extended remote control capabilities (Set-point reset, ice storage end, demand limits, boiler on/off command...)	254-1762
Touch Pilot control, 7" user interface	158A	Touch Pilot control supplied with a 7 inch colour touch screen user interface	Enhanced ease of use	254-1762
Leak detection	159	0-10 V signal to report any refrigerant leakage in the unit directly on the controller (the leak detector itself must be supplied by the customer)	Immediate customer notification of refrigerant losses to the atmosphere, allowing timely corrective actions	254-1762
Compliance with Swiss regulations	197	Additional tests on the water heat exchangers: supply (additional of PED documents) supplementary certificates and test certifications	Conformance with Swiss regulations	254-1762
Compliance with Australian regulations	200	Unit approved to Australian code	Conformance with Australian regulations	254-1762
Low noise level	257	Evaporator sound insulation	3 dB(A) quieter than standard unit	254-1762
Welded evaporator water connection kit	266	Victaulic piping connections with welded joints	Easy installation	254-1762
Welded condenser water connection kit	267	Victaulic piping connections with welded joints	Easy installation	254-1762
Flanged evaporator water connection kit	268	Victaulic piping connections with flanged joints	Easy installation	254-1762
Flanged condenser water connection kit	269	Victaulic piping connections with flanged joints	Easy installation	254-1762
Thermal compressor insulation	271	The compressor is covered with a thermal insulation layer	Prevents air humidity to condensate on the compressor surface	254-1762
230V electrical plug	284	230V AC power supply source provided with plug socket and transformer (180 VA, 0,8 Amps)	Permits connection of a laptop or an electrical device during unit commissioning or servicing	254-1762
Carrier Connect link (BSS regions only)	298	3G router board NOTE 1: require option 149 NOTE 2: when more than one machine is installed on site, only one of them shall be equipped with option 298 while all of them must be equipped with option 149. NOTE 3: if a CARRIER-PSM is on site, option 298 shall be integrated in the PSM while option 149 is still mandatory for each single unit.	Enabler for Carrier Connect service offer	254-1762

Physical data, standard units

Standard-efficiency units

30XW--/30XWH-	254	304	354	402	452	552	602	652	702	802	852	1002	1052	1154	1252	1352	1452	1552	1652	1702	
Air conditioning application as per EN14511-3:2013† - standard unit																					
Condition 1																					
Nominal cooling capacity	kW	273	307	359	459	473	532	538	677	730	792	839	1017	1060	1141	1257	1342	1453	1547	1654	1728
ESEER	kW/kW	5.67	5.58	5.58	5.75	5.77	5.78	5.66	6.06	6.02	5.79	5.94	6.30	6.34	6.23	6.73	6.44	6.27	6.06	6.40	6.34
EER	kW/kW	5.32	5.30	5.24	5.21	5.35	5.21	5.17	5.39	5.30	5.19	5.39	5.26	5.21	5.30	5.69	5.51	5.36	5.29	5.59	5.60
Eurovent class cooling	-	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	-	-	-
Air conditioning †† - standard unit																					
Condition 1																					
Nominal cooling capacity	kW	273	308	360	461	474	534	539	679	733	795	843	1021	1066	1146	1262	1349	1461	1557	1664	1739
ESEER	kW/kW	6.18	6.09	6.14	6.28	6.29	6.46	6.33	6.76	6.79	6.63	6.65	7.36	7.56	7.49	7.69	7.46	7.42	7.29	7.58	7.59
EER	kW/kW	5.54	5.52	5.48	5.42	5.57	5.46	5.43	5.65	5.58	5.50	5.66	5.56	5.53	5.64	5.97	5.82	5.71	5.67	5.96	6.00
Heating application as per EN14511-3:2013† - standard unit																					
Condition 2																					
Nominal heating capacity	kW	317	358	421	516	529	599	632	751	813	887	967	1138	1190	1320	1384	1481	1612	1717	1891	1969
COP	kW/kW	4.59	4.57	4.61	4.54	4.59	4.47	4.52	4.56	4.49	4.46	4.64	4.48	4.42	4.54	4.73	4.57	4.46	4.41	4.67	4.68
Eurovent class heating	-	A	A	A	A	A	A	A	A	A	A	B	A	A	A	-	-	-	-	-	
Heating application †† - standard unit																					
Condition 2																					
Nominal heating capacity	kW	316	357	419	514	527	597	629	748	810	883	964	1134	1186	1314	1380	1476	1606	1710	1884	1962
COP	kW/kW	4.80	4.78	4.84	4.74	4.79	4.70	4.78	4.78	4.73	4.73	4.93	4.76	4.74	4.89	5.02	4.88	4.81	4.80	5.10	5.15
Sound levels - standard unit																					
Sound power level*	dB(A)	95	95	95	99	99	99	99	99	99	99	99	102	102	102	102	102	102	102	102	102
Sound pressure level at 1 m**	dB(A)	78	78	78	82	82	82	82	82	82	82	82	84	84	84	83	83	83	83	83	83
Sound levels - standard unit + option 257***																					
Sound power level*	dB(A)	-	-	-	96	96	96	96	96	96	96	96	99	99	99	99	99	99	99	99	99
Sound pressure level at 1 m**	dB(A)	-	-	-	78	78	78	78	78	78	78	80	80	80	80	80	80	80	80	80	80
Dimensions - standard unit																					
Length	mm	2724	2724	2724	2741	2741	2741	2741	3059	3059	3059	3059	3059	3059	3059	4025	4025	4730	4730	4790	4790
Width	mm	928	928	928	936	936	936	936	1040	1040	1040	1040	1042	1036	1036	1156	1156	1156	1156	1902	1902
Height	mm	1567	1567	1567	1692	1692	1692	1692	1848	1848	1848	1898	1870	1870	1925	2051	2051	2051	2051	1515	1515
Operating weight****																					
Compressors																					
Semi-hermetic 06T screw compressors, 50 r/s																					
Circuit A	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Circuit B	-	-	-	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1	1	
Refrigerant**** - standard unit																					
R-134a																					
Circuit A	kg	84	80	78	92	92	92	92	145	140	135	140	85	85	105	120	115	110	105	195	195
Circuit B	kg	-	-	-	-	-	-	-	-	-	-	-	85	85	105	120	115	110	105	195	195
Global Warming Potential (GWP)																					
Tonnes of equivalent CO ₂ of greatest circuit	tonnes	120	114	112	132	132	132	132	207	200	193	200	122	122	150	172	164	157	150	279	279
Capacity control																					
Touch Pilot, electronic expansion valves (EXV)																					
Minimum capacity	%	15	15	15	15	15	15	15	15	15	15	15	10	10	10	10	10	10	10	10	
Evaporator																					
Multi-pipe flooded type																					
Water volume	l	50	56	61	70	70	70	70	109	109	109	98	182	182	205	301	301	301	301	354	354
Water connections (Victaulic)	in	5	5	5	5	5	5	5	6	6	6	6	6	6	8	8	8	8	8	8	8
Drain and vent connections (NPT)	in	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Max. water-side operating pressure	kPa	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Condenser																					
Multi-pipe flooded type																					
Water volume	l	55	55	55	76	76	76	76	109	109	109	137	193	193	193	340	340	340	340	426	426
Water connections (Victaulic)	in	5	5	5	5	5	5	5	6	6	6	8	8	8	8	8	8	8	8	8	8
Drain and vent connections (NPT)	in	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Max. water-side operating pressure	kPa	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000

† Eurovent-certified performances in accordance with standard EN14511-3:2013.

†† Gross performances, not in accordance with EN14511-3:2013. These performances do not take into account the correction for the proportional heating capacity and power input generated by the water pump to overcome the internal pressure drop in the heat exchanger.

Condition 1 : Cooling mode conditions, evaporator water entering/leaving temperature 12°C/7°C, condenser water entering/leaving temperature 30°C/35°C, evaporator fouling factor 0 m².K/W.

Condition 2: Cooling mode conditions, condenser water entering/leaving temperature 40°C/45°C, evaporator water entering/leaving temperature 10°C/7°C, evaporator fouling factor 0 m².K/W.

* In dB ref=10⁻¹² W, (A) weighting. Declared dualnumber noise emission values in accordance with ISO 4871 (with an associated uncertainty of +/-3dB(A)). Measured in accordance with ISO 9614-1 and certified by Eurovent.

** In dB ref 200Pa, (A) weighting. Declared dualnumber noise emission values in accordance with ISO 4871 (with an associated uncertainty of +/-3dB(A)). For information, calculated from the sound power level Lw(A).

*** Option 257 = Low noise level.

**** Weight shown is guideline only. Please refer to the unit nameplate.

Physical data, standard units

High-efficiency units

30XW-P/30XWHP	512	562	712	812	862	1012	1162	1314	1464	1612	1762
Air conditioning application as per EN14511-3:2013† - standard unit											
Condition 1											
Nominal cooling capacity	kW	509	577	737	786	861	1039	1157	1323	1452	1626
ESEER	kW/kW	6.09	6.14	6.41	6.24	6.17	6.74	6.83	6.65	6.36	6.80
EER	kW/kW	5.71	5.64	5.83	5.62	5.65	5.73	5.78	5.80	5.58	5.87
Eurovent class cooling	-	A	A	A	A	A	A	A	A	-	-
Air conditioning application †† - standard unit											
Condition 1											
Nominal cooling capacity	kW	510	578	739	788	863	1042	1161	1329	1459	1632
ESEER	kW/kW	6.61	6.77	6.94	6.83	6.84	7.47	7.89	7.70	7.48	7.65
EER	kW/kW	5.94	5.89	6.04	5.85	5.92	5.95	6.07	6.13	5.93	6.13
Heating application as per EN14511-3:2013† - standard unit											
Condition 2											
Nominal heating capacity	kW	583	662	842	904	982	1191	1320	1509	1663	1846
COP	kW/kW	4.91	4.84	4.97	4.80	4.85	4.90	4.86	4.89	4.71	4.89
Eurovent class heating	-	A	A	A	A	A	A	A	-	-	-
Heating application ††											
Condition 2											
Nominal heating capacity	kW	581	660	840	901	978	1188	1316	1503	1657	1841
COP	kW/kW	5.12	5.07	5.17	5.01	5.10	5.14	5.19	5.23	5.07	5.18
Sound levels - standard unit											
Sound power level*	dB(A)	99	99	99	99	99	102	102	102	102	102
Sound pressure level at 1 m**	dB(A)	82	82	81	81	83	83	83	83	83	83
Sound levels - standard unit + option 257***											
Sound power level*	dB(A)	96	96	96	96	96	99	99	99	99	99
Sound pressure level at 1 m**	dB(A)	78	78	78	78	78	80	80	80	80	80
Dimensions - standard unit											
Length	mm	3059	3059	3290	3290	3290	4730	4730	4730	4730	4832
Width	mm	936	936	1069	1069	1069	1039	1039	1162	1162	2129
Height	mm	1743	1743	1950	1950	1950	1997	1997	2051	2051	1562
Operating weight****											
kg											
Semi-hermetic 06T screw compressors, 50 r/s											
Circuit A											
Circuit B											
Refrigerant**** - standard unit											
R-134a											
Circuit A											
kg											
Circuit B											
Global Warming Potential (GWP)											
Tonnes of equivalent CO ₂ of greatest circuit	tonnes	186	186	257	250	243	172	172	215	186	343
Capacity control											
Touch Pilot, electronic expansion valves (EXV)											
Minimum capacity	%	15	15	15	15	15	10	10	10	10	10
Evaporator											
Multi-pipe flooded type											
Water volume	l	101	101	154	154	154	293	293	321	321	473
Water connections (Victaulic)	in	6	6	8	8	8	8	8	8	10	10
Drain and vent connections (NPT)	in	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Max. water-side operating pressure	kPa	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Condenser											
Multi-pipe flooded type											
Water volume	l	103	103	148	148	148	316	316	340	340	623
Water connections (Victaulic)	in	6	6	8	8	8	8	8	8	10	10
Drain and vent connections (NPT)	in	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Max. water-side operating pressure	kPa	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000

† Eurovent-certified performances in accordance with standard EN14511-3:2013.

†† Gross performances, not in accordance with EN14511-3:2013. These performances do not take into account the correction for the proportional heating capacity and power input generated by the water pump to overcome the internal pressure drop in the heat exchanger.

Condition 1 : Cooling mode conditions, evaporator water entering/leaving temperature 12°C/7°C, condenser water entering/leaving temperature 30°C/35°C, evaporator fouling factor 0 m².K/W.

Condition 2: Cooling mode conditions, condenser water entering/leaving temperature 40°C/45°C, evaporator water entering/leaving temperature 10°C/7°C, evaporator fouling factor 0 m².K/W.

* In dB ref=10¹² W, (A) weighting. Declared dualnumber noise emission values in accordance with ISO 4871 (with an associated uncertainty of +/-3dB(A)). Measured in accordance with ISO 9614-1 and certified by Eurovent.

** In dB ref 20µPa, (A) weighting. Declared dualnumber noise emission values in accordance with ISO 4871 (with an associated uncertainty of +/-3dB(A)). For information, calculated from the sound power level Lw(A).

*** Option 257 = Low noise level.

**** Weight shown is guideline only. Please refer to the unit nameplate.



Eurovent certified values

Electrical data, standard units

Standard-efficiency units

30XW-/30XWH-	254	304	354	402	452	552	602	652	702	802	852	1002	1052	1154	1252	1352	1452	1552	1652	1702
Power circuit																				
Nominal power supply	V-ph-Hz	400-3-50																		
Voltage range	V	360-440																		
Control circuit																				
Nominal start-up current*																				
Circuit A	A	233	233	303	414	414	414	414	587	587	587	414	414	414	587	587	587	587	587	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	414	414	414	587	587	587	587	587	
Option 81	A	-	-	-	-	-	-	-	-	-	-	558	574	574	747	780	801	819	819	
Maximum start-up current**																				
Circuit A	A	233	233	303	414	414	414	414	587	587	587	414	414	414	587	587	587	587	587	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	414	414	414	587	587	587	587	587	
Option 81	A	-	-	-	-	-	-	-	-	-	-	631	656	656	829	882	904	938	938	
Cosine phi																				
Nominal***		0.83	0.85	0.83	0.87	0.88	0.89	0.89	0.88	0.90	0.90	0.88	0.89	0.89	0.88	0.88	0.89	0.9	0.9	
Maximum****		0.89	0.89	0.88	0.90	0.90	0.91	0.91	0.90	0.91	0.92	0.92	0.90	0.91	0.91	0.90	0.90	0.91	0.92	
Total harmonic distortion****	%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Maximum power input†																				
Circuit A	kW	76	89	97	128	135	151	151	184	200	223	223	150	151	151	184	184	200	223	
Circuit B	kW	-	-	-	-	-	-	-	-	-	-	135	151	151	184	200	223	202	223	
Option 81	kW	-	-	-	-	-	-	-	-	-	284	301	301	334	367	399	447	425	447	
Nominal current drawn**																				
Circuit A	A	84	96	113	136	144	162	162	193	214	232	232	162	162	162	193	193	214	232	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	144	162	162	193	214	232	214	232	
Option 81	A	-	-	-	-	-	-	-	-	-	306	324	324	355	386	427	464	446	464	
Maximum current drawn (Un)†																				
Circuit A	A	123	145	160	206	217	242	242	295	317	351	351	242	242	242	295	295	317	351	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	217	242	242	295	317	351	317	351	
Option 81	A	-	-	-	-	-	-	-	-	-	-	459	484	484	537	590	634	702	668	
Maximum current drawn (Un -10%)****																				
Circuit A	A	138	162	178	218	230	260	260	304	340	358	358	260	260	260	304	340	358	358	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	230	260	260	304	340	358	340	358	
Option 81	A	-	-	-	-	-	-	-	-	-	-	490	520	520	564	608	680	716	698	
Maximum power input with option 150B†																				
Circuit A	kW	67	79	87	114	118	133	134	173	183	205	205	133	133	133	173	173	207	207	
Circuit B	kW	-	-	-	-	-	-	-	-	-	-	118	133	133	173	183	207	185	207	
Option 81	kW	-	-	-	-	-	-	-	-	-	-	251	265	265	305	346	414	391	414	
Maximum current drawn (Un) with option 150B†																				
Circuit A	A	109	129	142	183	191	212	212	278	290	325	325	212	212	212	278	278	325	325	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	191	212	212	212	278	290	325	290	
Option 81	A	-	-	-	-	-	-	-	-	-	-	403	424	424	490	556	580	650	650	

High-efficiency units

30XW-P/30XWHP	512	562	712	812	862	1012	1162	1314	1464	1612	1762
Power circuit											
Nominal power supply	V-ph-Hz	400-3-50									
Voltage range	V	360-440									
Control circuit											
Nominal start-up current*											
Circuit A	A	414	414	587	587	587	414	414	587	587	587
Circuit B	A	-	-	-	-	-	414	414	414	587	587
Option 81	A	-	-	-	-	-	556	574	747	780	801
Maximum start-up current**											
Circuit A	A	414	414	587	587	587	414	414	587	587	587
Circuit B	A	-	-	-	-	-	414	414	414	587	587
Option 81	A	-	-	-	-	-	631	656	829	882	938
Cosine phi											
Nominal***		0.88	0.89	0.88	0.89	0.90	0.86	0.87	0.88	0.88	0.90
Maximum****		0.90	0.90	0.90	0.91	0.92	0.89	0.90	0.90	0.90	0.92
Total harmonic distortion****	%	0	0	0	0	0	0	0	0	0	0
Maximum power input†											
Circuit A	kW	135	151	184	200	223	134	151	184	184	200
Circuit B	kW	-	-	-	-	-	134	151	151	184	200
Option 81	kW	-	-	-	-	-	267	301	334	367	399
Nominal current drawn**											
Circuit A	A	144	162	193	214	232	144	162	193	193	214
Circuit B	A	-	-	-	-	-	144	162	162	193	214
Option 81	A	-	-	-	-	-	288	324	355	386	427
Maximum current drawn (Un)†											
Circuit A	A	217	242	295	317	351	217	242	295	295	317
Circuit B	A	-	-	-	-	-	217	242	242	295	317
Option 81	A	-	-	-	-	-	434	484	537	590	634
Maximum current drawn (Un -10%)****											
Circuit A	A	230	260	304	340	358	230	260	304	304	358
Circuit B	A	-	-	-	-	-	230	260	304	340	358
Option 81	A	-	-	-	-	-	460	520	564	608	716
Maximum power input with option 150B†											
Circuit A	kW	118	133	173	183	207	118	133	173	173	207
Circuit B	kW	-	-	-	-	-	118	133	133	173	207
Option 81	kW	-	-	-	-	-	235	265	305	346	414
Maximum current drawn (Un) with option 150B†											
Circuit A	A	191	212	278	290	325	191	212	278	278	325
Circuit B	A	-	-	-	-	-	191	212	212	278	325
Option 81	A	-	-	-	-	-	382	424	490	556	650

* Instantaneous start-up current (maximum operating current of the smallest compressor(s) + locked rotor current or reduced start-up current of the largest compressor). Values obtained at standard Eurovent unit operating conditions: evaporator entering/leaving water temperature = 12°C/7°C, condenser entering/le

Physical data, units for high condensing temperatures

Standard-efficiency units (option 150)

30XW-/30XWH-	254	304	354	402	452	552	602	652	702	802	852	1002	1052	1154	1252	1352	1452	1552	1652	1702	
Air conditioning application as per EN14511-3:2013† - unit with option 150																					
Condition 1																					
Nominal cooling capacity	kW	282	313	352	424	455	507	524	644	710	743	827	996	1051	1135	1242	1329	1433	1533	1661	1719
EER	kW/kW	4.89	4.87	4.82	4.46	4.75	4.67	4.81	4.68	4.71	4.64	4.86	4.85	4.79	4.89	5.12	4.84	4.80	4.81	4.99	4.97
Air conditioning application †† - unit with option 150																					
Condition 1																					
Nominal cooling capacity	kW	282	314	353	425	456	509	526	646	713	746	831	1000	1057	1140	1248	1336	1440	1543	1671	1731
EER	kW/kW	5.08	5.06	5.03	4.62	4.94	4.88	5.04	4.88	4.94	4.89	5.08	5.11	5.06	5.19	5.36	5.08	5.06	5.13	5.28	5.29
Heating application as per EN14511-3:2013† - unit with option 150																					
Condition 2																					
Nominal heating capacity	kW	325	362	408	478	506	566	606	716	789	829	958	1099	1163	1294	1348	1465	1583	1677	1904	1975
COP	kW/kW	4.62	4.59	4.55	4.29	4.50	4.43	4.54	4.45	4.45	4.41	4.57	4.53	4.47	4.55	4.71	4.52	4.46	4.45	4.59	4.56
Eurovent class - heating	A	A	A	B	A	B	A	A	A	B	A	A	A	A	A	A	-	-	-	-	
Heating application †† - unit with option 150																					
Condition 2																					
Nominal heating capacity	kW	324	361	407	476	504	564	603	713	786	826	955	1094	1158	1288	1344	1460	1578	1672	1898	1968
COP	kW/kW	4.85	4.81	4.78	4.46	4.70	4.66	4.82	4.66	4.70	4.68	4.86	4.83	4.79	4.91	5.02	4.82	4.80	4.86	5.02	5.03
Sound levels - unit with option 150																					
Sound power level*	dB(A)	95	95	95	99	99	99	99	102	102	102	102	102	102	102	105	105	105	105	105	
Sound pressure level at 1 m**	dB(A)	78	78	78	82	82	82	82	84	84	84	84	84	84	84	86	86	86	86	86	
Sound levels - unit with option 257***																					
Sound power level*	dB(A)	-	-	-	96	96	96	96	100	100	100	100	99	99	99	103	103	103	103	103	
Sound pressure level at 1 m**	dB(A)	-	-	-	78	78	78	78	82	82	82	82	80	80	80	84	84	84	84	84	
Dimensions - unit with option 150																					
Length	mm	2724	2724	2724	2741	2741	2741	2741	3059	3059	3059	2780	4025	4025	4025	4730	4730	4730	4790	4790	
Width	mm	928	928	928	936	936	936	936	1090	1090	1090	1090	1036	1036	1036	1201	1201	1201	1947	1947	
Height	mm	1567	1567	1567	1692	1692	1692	1692	1858	1858	1858	1920	1870	1870	1925	2071	2071	2071	1535	1535	
Operating weight****																					
Compressors																					
Circuit A		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Circuit B		-	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1	1	1	
Refrigerant**** - unit with option 150																					
R-134a																					
Circuit A	kg	84	80	78	82	82	82	82	145	140	135	140	85	85	105	120	115	110	105	195	
Circuit B	kg	-	-	-	-	-	-	-	-	-	-	-	85	85	105	120	115	110	105	195	
Global Warming Potential (GWP)																					
Tonnes of equivalent CO ₂ of greatest circuit	tonnes	120	114	112	117	117	117	117	207	200	193	200	122	122	150	172	164	157	150	279	279
Capacity control																					
Minimum capacity	%	30	30	30	30	30	30	30	15	15	15	15	10	10	10	10	10	10	10	10	
Evaporator																					
Multi-pipe flooded type																					
Net water volume	l	50	56	61	70	70	70	70	109	109	109	98	182	182	205	301	301	301	354	354	
Water connections (Victaulic)	in	5	5	5	5	5	5	5	6	6	6	6	6	6	8	8	8	8	8	8	
Drain and vent connections (NPT)	in	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	
Max. water-side operating pressure	kPa	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	
Condenser																					
Multi-pipe flooded type																					
Net water volume	l	55	55	55	76	76	76	76	109	109	109	137	193	193	340	340	340	426	426		
Water connections (Victaulic)	in	5	5	5	5	5	5	5	6	6	6	8	8	8	8	8	8	8	8		
Drain and vent connections (NPT)	in	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8		
Max. water-side operating pressure	kPa	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000		

† Eurovent-certified performances in accordance with standard EN14511-3:2013.

†† Gross performances, not in accordance with EN14511-3:2013. These performances do not take into account the correction for the proportional heating capacity and power input generated by the water pump to overcome the internal pressure drop in the heat exchanger.


Conditions in cooling mode: evaporator entering/leaving water temperature 12°C/7°C, condenser entering/leaving water temperature 30°C/35°C, evaporator and condenser fouling factor = 0 m² K/W.

Conditions in heating mode: condenser entering/leaving water temperature 40°C/45°C, evaporator entering/leaving water temperature 10°C/7°C, evaporator and condenser fouling factor = 0 m² K/W.

* In dB ref=10⁻¹² W, (A) weighting. Declared dualnumber noise emission values in accordance with ISO 4871 (with an associated uncertainty of +/-3dB(A)). Measured in accordance with ISO 9614-1.

** In dB ref 20µPa, (A) weighting. Declared dualnumber noise emission values in accordance with ISO 4871 (with an associated uncertainty of +/-3dB(A)). For information, calculated from the sound power level Lw(A).

*** Option 257 = Low noise level.



Eurovent certified values

Physical data, units for high condensing temperatures

High-efficiency units (option 150)

30XW-P/30XWHP	512	562	712	812	862	1012	1162	1314	1464	1612	1762
Air conditioning application as per EN14511-3:2013† - unit with option 150											
Condition 1											
Nominal cooling capacity	kW	517	576	725	781	844	1024	1192	1302	1453	1633
EER	kW/kW	5.20	5.24	5.09	4.94	5.17	5.05	5.29	5.02	4.89	5.22
Air conditioning application ‡‡ - unit with option 150											
Condition 1											
Nominal cooling capacity	kW	518	578	727	783	846	1027	1197	1307	1460	1639
EER	kW/kW	5.39	5.46	5.26	5.12	5.37	5.24	5.55	5.27	5.16	5.52
Heating application as per EN14511-3:2013† - unit with option 150											
Condition 2											
Nominal heating capacity	kW	584	651	828	897	1003	1164	1341	1485	1669	1850
COP	kW/kW	4.88	4.89	4.81	4.68	4.94	4.73	4.86	4.69	4.58	4.84
Eurovent class - heating	-	A	A	A	A	A	A	A	A	-	-
Heating application ‡‡ - unit with option 150											
Condition 2											
Nominal heating capacity	kW	582	648	826	895	999	1161	1337	1479	1661	1844
COP	kW/kW	5.08	5.13	5.01	4.89	5.20	4.98	5.20	5.01	4.92	5.11
Sound levels - unit with option 150											
Sound power level*	dB(A)	99	99	102	102	102	102	102	105	105	105
Sound pressure level at 1 m**	dB(A)	82	82	84	84	84	83	83	86	86	86
Sound levels - unit with option 257***											
Sound power level*	dB(A)	96	96	100	100	100	99	99	103	103	103
Sound pressure level at 1 m**	dB(A)	78	78	82	82	82	80	80	84	84	84
Dimensions - unit with option 150											
Length	mm	3059	3059	3290	3290	3290	4730	4730	4730	4730	4832
Width	mm	936	936	1105	1105	1105	1039	1039	1202	1202	2174
Height	mm	1743	1743	1970	1970	1970	1997	1997	2071	2071	1585
Operating weight****	kg	2981	3020	4072	4117	4145	6872	6950	7721	8059	11225
Compressors											
Circuit A		1	1	1	1	1	1	1	1	1	1
Circuit B	-	-	-	-	-	-	1	1	1	1	1
Refrigerant**** - unit with option 150											
R-134a	kg	130	130	180	175	170	120	120	130	130	240
	kg	-	-	-	-	-	120	120	150	130	240
Global Warming Potential (GWP)											
Tonnes of equivalent CO ₂ of greatest circuit	tonnes	186	186	257	250	243	172	172	215	186	343
Capacity control											
Minimum capacity	%	30	30	15	15	15	10	10	10	10	10
Evaporator											
Multi-pipe flooded type											
Net water volume	l	101	101	154	154	154	293	293	321	321	473
Water connections (Victaulic)	in	6	6	8	8	8	8	8	8	8	10
Drain and vent connections (NPT)	in	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Max. water-side operating pressure	kPa	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Condenser											
Multi-pipe flooded type											
Net water volume	l	103	103	148	148	148	316	316	340	340	623
Water connections (Victaulic)	in	6	6	8	8	8	8	8	10	10	10
Drain and vent connections (NPT)	in	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Max. water-side operating pressure	kPa	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000

† Eurovent-certified performances in accordance with standard EN14511-3:2013.

‡ Gross performances, not in accordance with EN14511-3:2013. These performances do not take into account the correction for the proportional heating capacity and power input generated by the water pump to overcome the internal pressure drop in the heat exchanger.

Conditions in cooling mode: evaporator entering/leaving water temperature 12°C/7°C, condenser entering/leaving water temperature 30°C/35°C, evaporator and condenser fouling factor = 0 m²/K/W.

Conditions in heating mode: condenser entering/leaving water temperature 40°C/45°C, evaporator entering/leaving water temperature 10°C/7°C, evaporator and condenser fouling factor = 0 m²/K/W.

* In dB ref=10⁻¹² W, (A) weighting. Declared dualnumber noise emission values in accordance with ISO 4871 (with an associated uncertainty of +/-3dB(A)). Measured in accordance with ISO 9614-1 and certified by Eurovent.

** In dB ref 20µPa, (A) weighting. Declared dualnumber noise emission values in accordance with ISO 4871 (with an associated uncertainty of +/-3dB(A)). For information, calculated from the sound power level Lw(A).

*** Option 257 = Low noise level.

**** Weight shown is guideline only. Please refer to the unit nameplate.



Eurovent certified values

Electrical data, units for high condensing temperatures

Standard-efficiency units (option 150)

30XW--/30XWH-	254	304	354	402	452	552	602	652	702	802	852	1002	1052	1154	1252	1352	1452	1552	1652	1702
Power circuit																				
Nominal power supply V-ph-Hz 400-3-50																				
Voltage range V 360-440																				
Control circuit 24 V via the built-in transformer																				
Nominal start-up current*																				
Circuit A	A	303	388	388	587	587	587	587	772	772	772	772	587	587	587	772	772	772	772	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	-	587	587	587	772	772	772	772	
Option 81	A	-	-	-	-	-	-	-	-	-	-	-	757	757	757	943	965	986	1004	
Maximum start-up current**																				
Circuit A	A	303	388	388	587	587	587	587	772	772	772	772	587	587	587	772	772	772	772	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	-	587	587	587	772	772	772	772	
Option 81	A	-	-	-	-	-	-	-	-	-	-	-	887	887	887	1072	1172	1202	1232	
Cosine phi																				
Nominal***		0.79	0.78	0.79	0.83	0.85	0.85	0.85	0.84	0.86	0.87	0.87	0.85	0.85	0.85	0.86	0.86	0.87	0.87	
Maximum****		0.88	0.87	0.88	0.90	0.90	0.91	0.91	0.90	0.90	0.90	0.90	0.90	0.91	0.91	0.91	0.91	0.91	0.91	
Total harmonic distortion***	%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Maximum power input†																				
Circuit A	kW	97	111	122	156	173	191	191	249	268	286	286	191	191	191	252	252	271	290	
Circuit B	kW	-	-	-	-	-	-	-	-	-	-	-	173	191	191	191	252	271	290	
Option 81	kW	-	-	-	-	-	-	-	-	-	-	-	364	382	382	443	504	542	580	
Nominal current drawn***																				
Circuit A	A	95	109	125	150	162	171	171	193	214	232	232	171	171	171	210	210	230	250	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	-	162	171	171	171	210	230	250	
Option 81	A	-	-	-	-	-	-	-	-	-	-	-	333	342	342	381	420	460	500	
Maximum current drawn (Un)†																				
Circuit A	A	160	185	200	250	275	300	300	400	430	460	460	300	300	300	400	400	430	460	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	-	275	300	300	300	400	430	460	
Option 81	A	-	-	-	-	-	-	-	-	-	-	-	575	600	600	700	800	860	920	
Maximum current drawn (Un -10%)****																				
Circuit A	A	176	206	224	270	300	330	330	419	455	476	476	330	330	330	419	419	455	476	
Circuit B	A	-	-	-	-	-	-	-	-	-	-	-	300	330	330	330	419	455	476	
Option 81	A	-	-	-	-	-	-	-	-	-	-	-	630	660	660	749	838	910	952	

High-efficiency units (option 150)

30XW-P/30XWHP	512	562	712	812	862	1012	1162	1314	1464	1612	1762
Power circuit											
Nominal power supply V-ph-Hz 400-3-50											
Voltage range V 360-440											
Control circuit 24 V via the built-in transformer											
Nominal start-up current*											
Circuit A	A	587	587	772	772	772	587	587	772	772	772
Circuit B	A	-	-	-	-	-	587	587	772	772	772
Option 81	A	-	-	-	-	-	749	757	943	965	1004
Maximum start-up current**											
Circuit A	A	587	587	772	772	772	587	587	772	772	772
Circuit B	A	-	-	-	-	-	587	587	772	772	772
Option 81	A	-	-	-	-	-	862	887	1072	1172	1232
Cosine phi											
Nominal***		0.88	0.88	0.84	0.86	0.87	0.87	0.88	0.86	0.85	0.86
Maximum****		0.91	0.92	0.90	0.90	0.91	0.91	0.92	0.91	0.91	0.91
Total harmonic distortion***	%	0	0	0	0	0	0	0	0	0	0
Maximum power input†											
Circuit A	kW	173	191	252	271	290	173	191	252	252	271
Circuit B	kW	-	-	-	-	-	173	191	191	252	271
Option 81	kW	-	-	-	-	-	346	382	443	504	580
Nominal current drawn***											
Circuit A	A	162	171	210	230	250	162	171	210	210	230
Circuit B	A	-	-	-	-	-	162	171	171	210	230
Option 81	A	-	-	-	-	-	324	342	381	420	460
Maximum current drawn (Un)†											
Circuit A	A	275	300	400	430	460	275	300	400	400	430
Circuit B	A	-	-	-	-	-	275	300	300	400	430
Option 81	A	-	-	-	-	-	550	600	700	800	920
Maximum current drawn (Un -10%)****											
Circuit A	A	300	330	419	455	476	300	330	419	419	455
Circuit B	A	-	-	-	-	-	300	330	330	419	455
Option 81	A	-	-	-	-	-	600	660	749	838	910

* Instantaneous start-up current (maximum operating current of the smallest compressor(s) + locked rotor current or reduced start-up current of the largest compressor). Values based on standard Eurovent unit operating conditions: evaporator entering/leaving water temp. = 12°C/7°C, condenser entering/leaving water temp. = 30°C/35°C.

** Instantaneous start-up current (maximum operating current of the smallest compressor(s) + locked rotor current or reduced start-up current of the largest compressor). Values obtained at operation with maximum unit power input.

*** Values based on standard Eurovent unit operating conditions: evaporator entering/leaving water temp. = 12°C/7°C, condenser entering/leaving water temp. = 30°C/35°C.

**** Values obtained at operation with maximum unit power input.

† Values obtained at operation with maximum unit power input. Values given on the unit name plate.

Physical data, low-temperature units

Standard and high-efficiency 30XW--/30XWH- units (options 5 and 6)

Reference number	Option 5 (medium temperature)				Option 6 (low temperature)			
	P0512	P0562	P1012	-1154	P0512	P0562	P1012	-1154
Nominal cooling capacity*	kW	293	328	619	705	212	236	431
EER	kW/kW	3.44	3.52	3.58	3.63	2.67	2.73	2.67
Heating capacity	kW	371	413	776	882	285	315	579
Coefficient of performance (COP)	kW/kW	4.36	4.43	4.49	4.54	3.58	3.64	3.58
Nominal cooling capacity**	kW	308	346	654	755	234	253	474
EER	kW/kW	3.58	3.66	3.74	3.81	2.90	2.88	2.88
Heating capacity	kW	387	432	813	935	308	334	623
Coefficient of performance (COP)	kW/kW	4.49	4.57	4.65	4.72	3.81	3.80	3.79

Gross performances, not in accordance with EN14511-3:2013. These performances do not take into account the correction for the proportional heating capacity and power input generated by the water pump to overcome the internal pressure drop in the heat exchanger.

Option 5

* Values based on 25% ethylene glycol, evaporator entering/leaving temperatures of -2°C/-6°C and condenser entering/leaving water temperatures of 30°C/35°C.

** Values based on 24% propylene glycol, evaporator entering/leaving temperatures of +1°C/-3°C and condenser entering/leaving water temperatures of 30°C/35°C.

Note: Evaporator with 2 pass configuration with water inlet and outlet on the same side.

Option 6

* Values based on 35% ethylene glycol, evaporator entering/leaving temperatures of -8°C/-12°C and condenser entering/leaving water temperatures of 30°C/35°C.

** Values based on 30% propylene glycol, evaporator entering/leaving temperatures of -4°C/-8°C and condenser entering/leaving water temperatures of 30°C/35°C.

Note: Evaporator with 3 pass configuration with water inlet and outlet on opposite sides.

Electrical data, low-temperature units

Standard and high-efficiency 30XW--/30XWH- units (options 5 and 6)

Reference number	Options 5 and 6			
	P0512	P0562	P1012	-1154
Power circuit				
Nominal power supply	V-ph-Hz	400-3-50		
Voltage range	V	360-440		
Control circuit	24 V via the built-in transformer			
Nominal start-up current*				
Circuits A/B	A	587/-	587/-	587/587
Option 81	A	-	-	749 757
Maximum start-up current**				
Circuits A/B	A	587/-	587/-	587/587
Option 81	A	-	-	862 887
Cosine phi				
Nominal***		0.88	0.88	0.87
Maximum****		0.91	0.92	0.91
Total harmonic distortion **** %		0	0	0
Maximum power input†				
Circuits A/B	kW	173/-	191/-	173/173
Option 81	kW	-	-	346 382
Nominal current drawn***				
Circuits A/B	A	162/-	171/-	162/162
Option 81	A	-	-	324 342
Maximum current drawn (Un)†				
Circuits A/B	A	275/-	300/-	275/275
Option 81	A	-	-	550 600
Maximum current drawn (Un -10%)****				
Circuits A/B	A	300/-	330/-	300/300
Option 81	A	-	-	600 660

* Instantaneous start-up current (maximum operating current of the smallest compressor(s) + locked rotor current or reduced start-up current of the largest compressor). Values obtained at standard Eurovent unit operating conditions: evaporator entering/leaving water temperature = 12°C/7°C, condenser entering/leaving water temperature = 30°C/35°C.

** Instantaneous start-up current (maximum operating current of the smallest compressor(s) + locked rotor current or reduced start-up current of the largest compressor). Values obtained at operation with maximum unit power input.

*** Values obtained at standard Eurovent unit operating conditions: evaporator entering/leaving water temperature = 12°C/7°C, condenser entering/leaving water temperature = 30°C/35°C. Maximum values obtained at operation with maximum unit power input.

**** Values obtained at operation with maximum unit power input.

† Values obtained at operation with maximum unit power input. Values given on the unit name plate.

Notes, electrical data and operating conditions 30XW

- As standard
30XW 254 to 862 units have a single power connection point located immediately upstream of the main disconnect switch.
30XW 1002 to 1762 units have two connection points located immediately upstream of the main disconnect switches.
- The control box includes the following standard features:
 - One main disconnect switch per circuit*
 - Starter and motor protection devices for each compressor
 - Anti-short cycle protection devices*
 - Control devices
- Field connections:
All connections to the system and the electrical installations must be in full accordance with all applicable codes.
- The Carrier 30XW units are designed and built to ensure conformance with local codes. The recommendations of European standard EN 60204-1 (corresponds to IEC 60204-1) (machine safety - electrical machine components - part 1: general regulations) are specifically taken into account, when designing the electrical equipment.
- The absence of power supply disconnect switch(es) and short-cycle protection devices in option 82A is an important factor that has to be taken into consideration at the installation site.
Units equipped with one of these two options are supplied with a declaration of incorporation, as required by the machinery directive.

Notes:

- Generally the recommendations of IEC 60364 are accepted as compliance with the requirements of the installation directives. Conformance with EN 60204-1 is the best means of ensuring compliance with the Machines Directive.
- Annex B of EN 60204-1 describes the electrical characteristics used for the operation of the machines.

- The operating environment for the 30XW units is specified below:

- Environment** Environment as classified in EN 60721 (corresponds to IEC 60721):
 - indoor installation
 - ambient temperature range: minimum temperature +5°C to +42°C, class AA4
 - altitude: lower than or equal to 2000 m
 - presence of water: class AD2 (possibility of water droplets)
 - presence of hard solids, class 4S2 (no significant dust present)
 - presence of corrosive and polluting substances, class 4C2 (negligible)

- Power supply frequency variation: ± 2 Hz.
- The neutral (N) line must not be connected directly to the unit (if necessary use a transformer).
- Oversupply protection of the power supply conductors is not provided with the unit.
- The factory installed disconnect switch(es)/circuit breaker(s) is (are) of a type suitable for power interruption in accordance with EN 60947-3 (corresponds to IEC 60947-3).
- The units are designed for connection to TN networks (IEC 60364). For IT networks the earth connection must not be at the network earth. Provide a local earth, consult competent local organisations to complete the electrical installation.

NOTE: If particular aspects of an actual installation do not conform to the conditions described above, or if there are other conditions which should be considered, always contact your local Carrier representative.

* Not provided for units equipped with option 82A

** The required protection level for this class is IP21B or 1PX1B (according to reference document IEC 60529). All 30XW units fulfil this protection condition. In general the casings fulfil class IP23 or IPX3B.

Part load performances

With the rapid increase in energy costs and the care about environmental impacts of electricity production, power consumption of air conditioning equipment has become an important topic. The energy efficiency of a unit at full load is rarely representative of the actual performance of the units, as on average a unit works less than 5% of the time at full load.

IPLV (in accordance with AHRI 550/590)

The IPLV (integrated part load value) allows evaluation of the average energy efficiency based on four operating conditions defined by the AHRI (Air Conditioning, Heating and Refrigeration Institute). The IPLV is the average weighted value of the energy efficiency ratios (EER) at different operating conditions, weighted by the operating time.

IPLV (integrated part load value)

Load %	Condenser entering water temperature, °C	Energy efficiency	Operating time, %
100	29.4	EER ₁	1
75	23.9	EER ₂	42
50	18.3	EER ₃	45
25	18.3	EER ₄	12

$$\text{IPLV} = \text{EER}_1 \times 1\% + \text{EER}_2 \times 42\% + \text{EER}_3 \times 45\% + \text{EER}_4 \times 12\%$$

Note: Constant leaving water temperature 6.67°C (44°F).
Condenser fouling factor: 0.44×10^{-4} (m² K)/W, evaporator fouling factor: 0.18×10^{-4} (m² K)/W.

The heat load of a building depends on many factors, such as the outside air temperature, the exposure to the sun and its occupation.

Consequently it is preferable to use the average energy efficiency, calculated at several operating points that are representative for the unit utilisation.

ESEER (in accordance with EUROVENT)

The ESEER (European seasonal energy efficiency ratio) permits evaluation of the average energy efficiency at part load, based on four operating conditions defined by Eurovent. The ESEER is the average value of energy efficiency ratios (EER) at different operating conditions, weighted by the operating time.

ESEER (European seasonal energy efficiency ratio)

Load %	Condenser entering water temperature, °C	Energy efficiency	Operating time, %
100	30	EER ₁	3
75	26	EER ₂	33
50	22	EER ₃	41
25	18	EER ₄	23

$$\text{ESEER} = \text{EER}_1 \times 3\% + \text{EER}_2 \times 33\% + \text{EER}_3 \times 41\% + \text{EER}_4 \times 23\%$$

Note: Constant leaving water temperature 7°C.

Part-load performances - standard units

30XW-/30XWH		254	304	354	402	452	552	602	652	702	802	852	1002	1052	1154	1252	1352	1452	1552	1652	1702
Standard-efficiency units																					
IPLV	kW/kW	6.84	6.71	6.72	6.66	6.90	6.90	6.89	7.35	7.32	7.18	7.18	7.54	7.75	7.60	8.07	7.83	7.73	7.57	7.96	7.89
ESEER	kW/kW	5.67	5.58	5.58	5.75	5.77	5.78	5.66	6.06	6.02	5.79	5.94	6.30	6.34	6.23	6.73	6.44	6.27	6.06	6.40	6.34
30XW-P/30XWHP 512 562 712 812 862 1012 1162 1314 1464 1612 1762																					
High-efficiency units																					
IPLV	kW/kW	7.32	7.47	7.67	7.51	7.44	7.75	8.13					8.07	7.85	8.20	7.90					
ESEER	kW/kW	6.09	6.14	6.41	6.24	6.17	6.71	6.83					6.65	6.36	6.80	6.60					

ESEER Calculations according to standard performances (in accordance with EN14511-3:2013) and certified by Eurovent.

IPLV Calculations according to standard performances (in accordance with AHRI 550-590).

Part-load performances - units for high condensing temperatures (option 150)

30XW-/30XWH		254	304	354	402	452	552	602	652	702	802	852	1002	1052	1154	1252	1352	1452	1552	1652	1702
Standard-efficiency units (with option 150)																					
IPLV	kW/kW	6.49	6.66	6.66	6.05	6.30	6.42	6.31	6.05	6.33	6.18	6.59	6.85	6.85	6.76	6.95	6.41	6.92	6.95	6.95	7.12
ESEER	kW/kW	5.73	5.88	5.82	5.42	5.62	5.66	5.57	5.35	5.43	5.21	5.56	5.84	5.77	5.69	5.98	5.54	5.81	5.74	5.89	5.99
30XW-P/30XWHP 512 562 712 812 862 1012 1162 1314 1464 1612 1762																					
High-efficiency units (with option 150)																					
IPLV	kW/kW	6.73	6.92	7.12	6.86	7.06	6.71	7.28					7.16	7.26	7.54	7.82					
ESEER	kW/kW	6.01	6.12	6.25	6.05	5.96	5.92	6.23					6.10	6.07	6.59	6.60					

ESEER Calculations according to standard performances (in accordance with EN14511-3:2013) and certified by Eurovent.

IPLV Calculations according to standard performances (in accordance with AHRI 550-590).

Sound spectrum

30XW units

	Octave bands, Hz						Sound power levels	
	125	250	500	1k	2k	4k		
Standard-efficiency units 30XW--/30XWH-								
254	dB	56	81	86	93	88	70	dB(A) 95
304	dB	56	81	86	93	88	70	dB(A) 95
354	dB	56	81	86	93	88	70	dB(A) 95
402	dB	76	85	94	97	87	75	dB(A) 99
452	dB	76	85	94	97	87	75	dB(A) 99
552	dB	76	85	94	97	87	75	dB(A) 99
602	dB	76	85	94	97	87	75	dB(A) 99
652	dB	72	84	94	97	89	74	dB(A) 99
702	dB	72	84	94	97	89	74	dB(A) 99
802	dB	72	84	94	97	89	74	dB(A) 99
852	dB	72	84	94	97	89	74	dB(A) 99
1002	dB	79	88	97	100	90	78	dB(A) 102
1052	dB	79	88	97	100	90	78	dB(A) 102
1154	dB	79	88	97	100	90	78	dB(A) 102
1252	dB	79	88	97	100	90	78	dB(A) 102
1352	dB	77	88	97	100	91	78	dB(A) 102
1452	dB	75	87	97	100	92	77	dB(A) 102
1552	dB	75	87	97	100	92	77	dB(A) 102
1652	dB	75	87	97	100	92	77	dB(A) 102
1702	dB	75	87	97	100	92	77	dB(A) 102
High-efficiency units 30XW-P/30XWHP								
512	dB	76	85	94	97	87	75	dB(A) 99
562	dB	76	85	94	97	87	75	dB(A) 99
712	dB	72	84	94	97	89	74	dB(A) 99
812	dB	72	84	94	97	89	74	dB(A) 99
862	dB	72	84	94	97	89	74	dB(A) 99
1012	dB	79	88	97	100	90	78	dB(A) 102
1162	dB	79	88	97	100	90	78	dB(A) 102
1314	dB	77	88	97	100	91	78	dB(A) 102
1464	dB	75	87	97	100	92	77	dB(A) 102
1612	dB	75	87	97	100	92	77	dB(A) 102
1762	dB	75	87	97	100	92	77	dB(A) 102

30XW units with option 257*

	Octave bands, Hz						Sound power levels	
	125	250	500	1k	2k	4k		
Standard-efficiency units 30XW--/30XWH-								
254	dB	-	-	-	-	-	-	dB(A) -
304	dB	-	-	-	-	-	-	dB(A) -
354	dB	-	-	-	-	-	-	dB(A) -
402	dB	76	85	90	93	85	75	dB(A) 96
452	dB	76	85	90	93	85	75	dB(A) 96
552	dB	76	85	90	93	85	75	dB(A) 96
602	dB	76	85	90	93	85	75	dB(A) 96
652	dB	72	84	90	93	87	74	dB(A) 96
702	dB	72	84	90	93	87	74	dB(A) 96
802	dB	72	84	90	93	87	74	dB(A) 96
852	dB	72	84	90	93	87	74	dB(A) 96
1002	dB	79	88	93	96	88	78	dB(A) 99
1052	dB	79	88	93	96	88	78	dB(A) 99
1154	dB	79	88	93	96	88	78	dB(A) 99
1252	dB	79	88	93	96	88	78	dB(A) 99
1352	dB	77	87	93	96	89	77	dB(A) 99
1452	dB	77	87	93	96	89	77	dB(A) 99
1552	dB	77	87	93	96	89	77	dB(A) 99
1652	dB	77	87	93	96	89	77	dB(A) 99
1702	dB	77	87	93	96	89	77	dB(A) 99
High-efficiency units 30XW-P/30XWHP								
512	dB	76	85	90	93	85	75	dB(A) 96
562	dB	76	85	90	93	85	75	dB(A) 96
712	dB	72	84	90	93	87	74	dB(A) 96
812	dB	72	84	90	93	87	74	dB(A) 96
862	dB	72	84	90	93	87	74	dB(A) 96
1012	dB	79	88	93	96	88	78	dB(A) 99
1162	dB	79	88	93	96	88	78	dB(A) 99
1314	dB	77	87	93	96	89	77	dB(A) 99
1464	dB	77	87	93	96	89	77	dB(A) 99
1612	dB	77	87	93	96	89	77	dB(A) 99
1762	dB	77	87	93	96	89	77	dB(A) 99

* Option 257 = Low sound level

Note: The sound levels by octave bands are given for information only and not contractually binding. Only the global sound level is contractually binding.

30XW units with high condensing temperature (option 150)

	Octave bands, Hz						Sound power levels	
	125	250	500	1k	2k	4k		
Standard-efficiency units 30XW--/30XWH- (option 150)								
254	dB	55	80	89	92	88	77	dB(A) 95
304	dB	55	80	89	92	88	77	dB(A) 95
354	dB	55	80	89	92	88	77	dB(A) 95
402	dB	76	85	94	97	97	87	dB(A) 99
452	dB	76	85	94	97	97	87	dB(A) 99
552	dB	76	85	94	97	97	87	dB(A) 99
602	dB	76	85	94	97	97	87	dB(A) 99
652	dB	69	89	97	99	92	77	dB(A) 102
702	dB	69	89	97	99	92	77	dB(A) 102
802	dB	69	89	97	99	92	77	dB(A) 102
852	dB	69	89	97	99	92	77	dB(A) 102
1002	dB	79	88	97	100	90	78	dB(A) 102
1052	dB	79	88	97	100	90	78	dB(A) 102
1154	dB	79	88	97	100	90	78	dB(A) 102
1252	dB	79	88	97	100	90	78	dB(A) 102
1352	dB	74	92	100	102	95	79	dB(A) 105
1452	dB	74	92	100	102	95	79	dB(A) 105
1552	dB	74	92	100	102	95	79	dB(A) 105
1652	dB	74	92	100	102	95	79	dB(A) 105
1702	dB	74	92	100	102	95	79	dB(A) 105
High-efficiency units 30XW-P/30XWHP (option 150)								
512	dB	76	85	90	93	85	75	dB(A) 99
562	dB	76	85	90	93	85	75	dB(A) 99
712	dB	69	89	93	98	91	76	dB(A) 102
812	dB	69	89	93	98	91	76	dB(A) 102
862	dB	69	89	93	98	91	76	dB(A) 102
1012	dB	79	88	93	96	88	78	dB(A) 102
1162	dB	79	88	93	96	88	78	dB(A) 102
1314	dB	74	92	100	102	95	79	dB(A) 105
1464	dB	74	92	100	102	95	79	dB(A) 105
1612	dB	74	92	100	102	95	79	dB(A) 105
1762	dB	74	92	100	102	95	79	dB(A) 105

	Octave bands, Hz						Sound power levels	
	125	250	500	1k	2k	4k		
Standard-efficiency units 30XW--/30XWH- (option 150)								
254	dB	-	-	-	-	-	-	dB(A) -
304	dB	-	-	-	-	-	-	dB(A) -
354	dB	-	-	-	-	-	-	dB(A) -
402	dB	76	85	90	93	85	75	dB(A) 96
452	dB	76	85	90	93	85	75	dB(A) 96
552	dB	76	85	90	93	85	75	dB(A) 96
602	dB	76	85	90	93	85	75	dB(A) 96
652	dB	69	89	93	98	91	76	dB(A) 100
702	dB	69	89	93	98	91	76	dB(A) 100
802	dB	69	89	93	98	91	76	dB(A) 100
852	dB	69	89	93	98	91	76	dB(A) 100
1002	dB	79	88	93	96	88	78	dB(A) 99
1052	dB	79	88	93	96	88	78	dB(A) 99
1154	dB	79	88	93	96	88	78	dB(A) 99
1252	dB	79	88	93	96	88	78	dB(A) 99
1352	dB	74	92	96	101	94	78	dB(A) 103
1452	dB	74	92	96	101	94	78	dB(A) 103
1552	dB	74	92	96	101	94	78	dB(A) 103
1652	dB	74	92	96	101	94	78	dB(A) 103
1702	dB	74	92	96	101	94	78	dB(A) 103
High-efficiency units 30XW-P/30XWHP (option 150)								
512	dB	76	85	90	93	85	75	dB(A) 96

Sound spectrum (continued)

30XW with "Very low sound level" accessory

		Octave bands, Hz						Sound power levels	
		125	250	500	1k	2k	4k		
Standard-efficiency units 30XW-/30XWH-									
254	dB	51	64	67	72	68	57	dB(A)	75
304	dB	51	64	67	72	68	57	dB(A)	75
354	dB	51	64	67	72	68	57	dB(A)	75
402	dB	71	68	75	74	65	61	dB(A)	79
452	dB	71	68	75	74	65	61	dB(A)	79
552	dB	71	68	75	74	65	61	dB(A)	79
602	dB	71	68	75	74	65	61	dB(A)	79
652	dB	67	67	75	74	67	60	dB(A)	79
702	dB	67	67	75	74	67	60	dB(A)	79
802	dB	67	67	75	74	67	60	dB(A)	79
852	dB	67	67	75	74	67	60	dB(A)	79
1002	dB	70	72	78	79	67	60	dB(A)	82
1052	dB	70	72	78	79	67	60	dB(A)	82
1154	dB	70	72	78	79	67	60	dB(A)	82
1252	dB	70	72	78	79	67	60	dB(A)	82
1352	dB	68	72	78	79	68	60	dB(A)	82
1452	dB	66	71	78	79	69	59	dB(A)	82
1552	dB	66	71	78	79	69	59	dB(A)	82
1652	dB	66	71	78	79	69	59	dB(A)	82
1702	dB	-	-	-	-	-	-	dB(A)	-
High-efficiency units 30XW-P/30XWHP									
512	dB	71	68	75	74	65	61	dB(A)	79
562	dB	71	68	75	74	65	61	dB(A)	79
712	dB	67	67	75	74	67	60	dB(A)	79
812	dB	67	67	75	74	67	60	dB(A)	79
862	dB	67	67	75	74	67	60	dB(A)	79
1012	dB	70	72	78	79	67	60	dB(A)	82
1162	dB	70	72	78	79	67	60	dB(A)	82
1314	dB	68	72	78	79	68	60	dB(A)	82
1464	dB	66	71	78	79	69	59	dB(A)	82
1612	dB	-	-	-	-	-	-	dB(A)	-
1762	dB	-	-	-	-	-	-	dB(A)	-

Note: The sound levels by octave bands are given for information only and not contractually binding. Only the global sound level is contractually binding.

30XW unit with high condensing temperature (option 150) and "Very low sound level" accessory

		Octave bands, Hz						Sound power levels	
		125	250	500	1k	2k	4k		
Standard-efficiency units 30XW-/30XWH- (option 150)									
254	dB	50	64	70	71	68	64	dB(A)	75
304	dB	50	64	70	71	68	64	dB(A)	75
354	dB	50	64	70	71	68	64	dB(A)	75
402	dB	71	68	75	74	65	61	dB(A)	79
452	dB	71	68	75	74	65	61	dB(A)	79
552	dB	71	68	75	74	65	61	dB(A)	79
602	dB	71	68	75	74	65	61	dB(A)	79
652	dB	64	72	78	78	72	64	dB(A)	82
702	dB	64	72	78	78	72	64	dB(A)	82
802	dB	64	72	78	78	72	64	dB(A)	82
852	dB	64	72	78	78	72	64	dB(A)	82
1002	dB	74	71	78	77	68	64	dB(A)	82
1052	dB	74	71	78	77	68	64	dB(A)	82
1154	dB	74	71	78	77	68	64	dB(A)	82
1252	dB	74	71	78	77	68	64	dB(A)	82
1352	dB	65	76	81	81	72	61	dB(A)	85
1452	dB	65	76	81	81	72	61	dB(A)	85
1552	dB	65	76	81	81	72	61	dB(A)	85
1652	dB	65	76	81	81	72	61	dB(A)	85
1702	dB	-	-	-	-	-	-	dB(A)	-
High-efficiency units 30XW-P/30XWHP (option 150)									
512	dB	71	68	75	74	65	61	dB(A)	79
562	dB	71	68	75	74	65	61	dB(A)	79
712	dB	64	72	78	78	72	64	dB(A)	82
812	dB	64	72	78	78	72	64	dB(A)	82
862	dB	64	72	78	78	72	64	dB(A)	82
1012	dB	74	71	78	77	68	64	dB(A)	82
1162	dB	74	71	78	77	68	64	dB(A)	82
1314	dB	65	76	81	81	72	61	dB(A)	85
1464	dB	65	76	81	81	72	61	dB(A)	85
1612	dB	-	-	-	-	-	-	dB(A)	-
1762	dB	-	-	-	-	-	-	dB(A)	-

Operating limits and operating ranges


Standard 30XW-- and 30XW-P units	Minimum	Maximum
Evaporator		
Entering temperature at start-up	-	35.0°C
Leaving temperature during operation	3.3°C*	20.0°C
Entering/leaving temperature difference at full load	2.8 K	11.1 K
Condenser		
Entering temperature at start-up	13.0°C**	-
Leaving temperature during operation	19.0°C**	50.0°C***
Entering/leaving temperature difference at full load	2.8 K	11.1 K

* For low-temperature applications, where the leaving water temperature is below 3.3°C, a frost protection solution must be used. Please refer to option 5 and option 6.


** For lower condenser temperatures, a water flow control valve must be used at the condenser (two or three-way valve). Please refer to option 152 to ensure the correct condensing temperature.

*** Please refer to option 150 for applications with a high condenser leaving temperature (up to 63°C).


Standard units

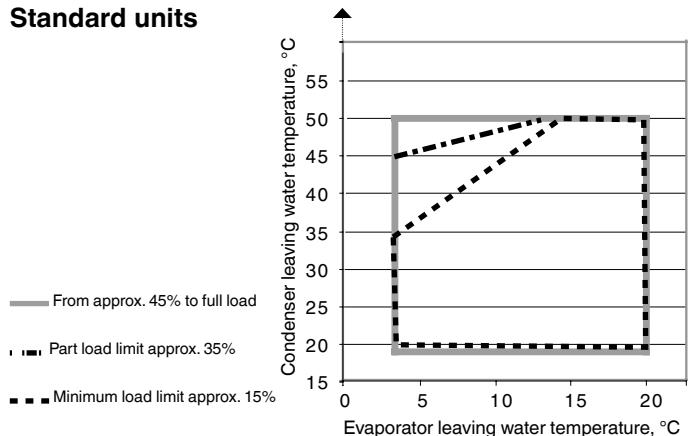

Option 150

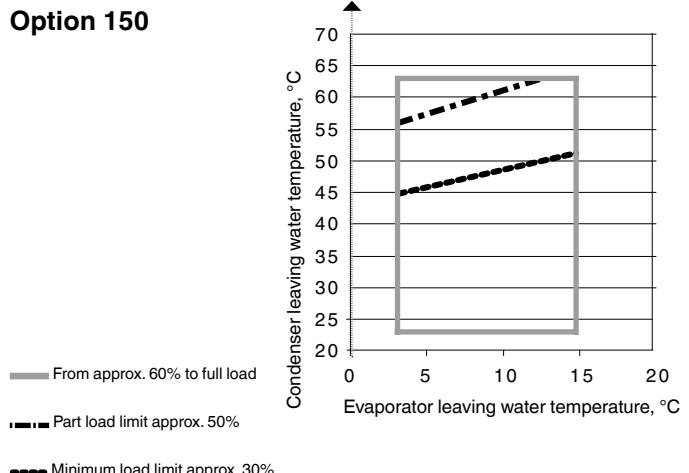

Options 5 and 6

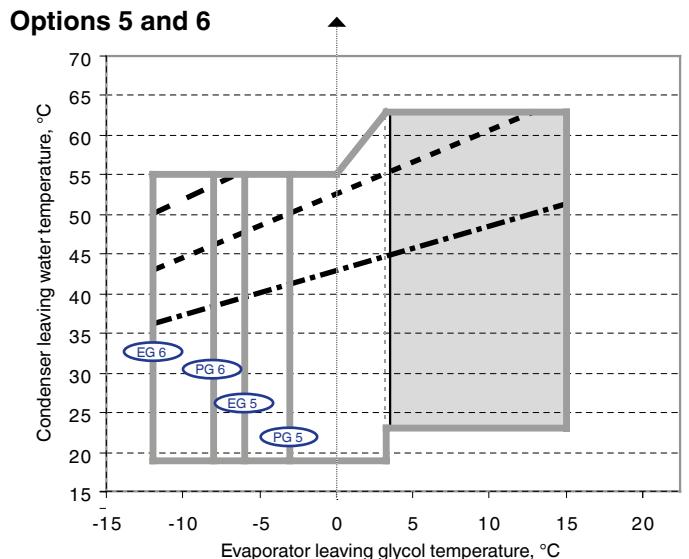


- Operating range permitted, but performances are not optimised
- Full load with option 5/6 and ethylene or propylene glycol
- Part load limit approx. 80%
- Part load limit approx. 50%
- Part load limit approx. 30%

NOTES: Ambient temperatures: During storage and transport of the 30XW units (including by container) the minimum and maximum permissible temperatures are -20°C and 72°C (and 65°C for option 200).

For more precise details refer to the unit selection program.

Evaporator pressure drop curves


**Units with two evaporator passes (standard):
30XW--/30XWH-30XW-P/30XWHP**

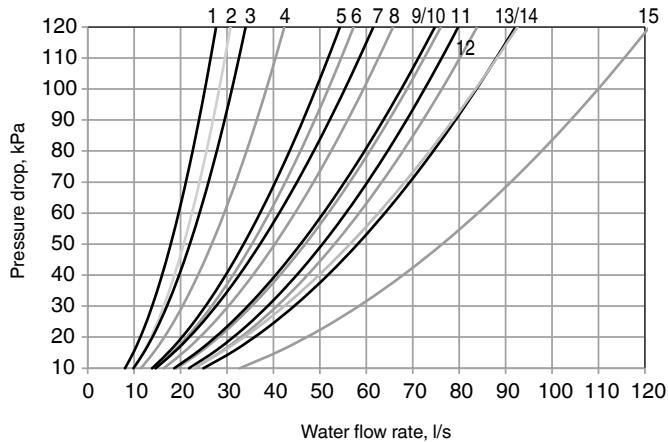

Legend

- 1. 254
- 2. 304
- 3. 354
- 4. 402, 452, 552, 602
- 5. 512, 562
- 6. 652, 702, 802
- 7. 852
- 8. 1002, 1052
- 9. 1154
- 10. 712, 812, 862
- 11. 1012, 1162
- 12. 1252, 1352, 1452, 1552
- 13. 1314, 1464
- 14. 1652, 1702
- 15. 1612, 1762

**Units with one evaporator pass (option 100C):
30XW--/30XWH-30XW-P/30XWHP**

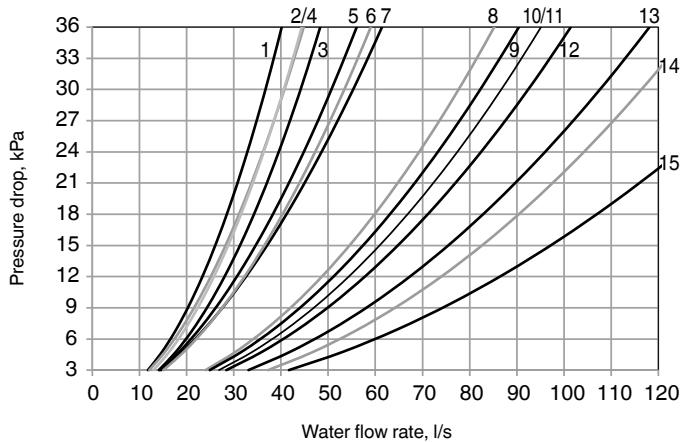


Legend

- 1. 254
- 2. 304
- 3. 354
- 4. 402, 452, 552, 602
- 5. 512, 562
- 6. 652, 702, 802
- 7. 852
- 8. 1002, 1052
- 9. 1012, 1162
- 10. 712, 812, 862
- 11. 1252, 1352, 1452, 1552
- 12. 1154
- 13. 1314, 1464
- 14. 1652, 1702
- 15. 1612, 1762

Condenser pressure drop curves


**Units with two condenser passes (standard):
30XW--/30XWH-30XW-P/30XWHP**

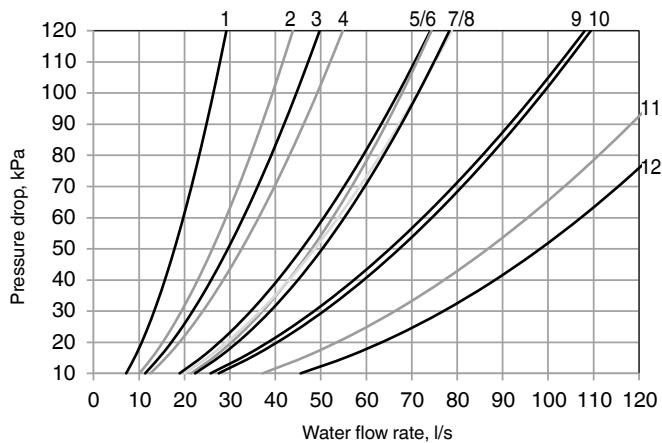

Legend

- 1. 254, 304, 354
- 2. 402, 452, 552, 602
- 3. 512, 562
- 4. 652, 702, 802
- 5. 712, 812, 862
- 6. 852
- 7. 1154
- 8. 1002, 1052
- 9. 1012, 1162
- 10. 1252, 1352, 1452, 1552, 1314, 1464
- 11. 1652, 1702
- 12. 1612, 1762

**Units with one condenser pass (option 102C):
30XW--/30XWH-30XW-P/30XWHP**

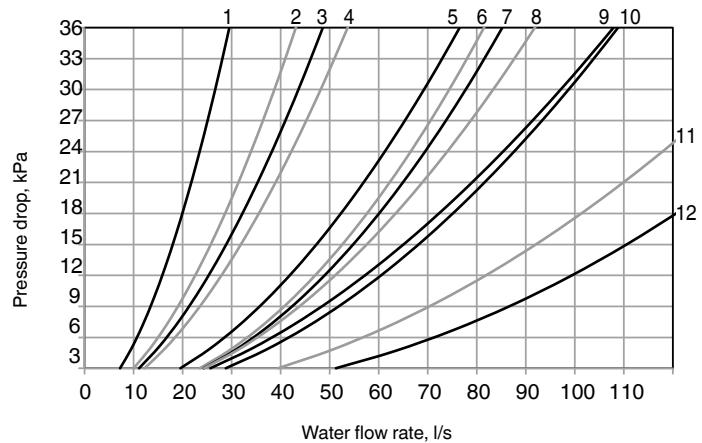


Legend

- 1. 254, 304, 354
- 2. 402, 452, 552, 602
- 3. 512, 562
- 4. 652, 702, 802
- 5. 712, 812, 862
- 6. 852
- 7. 1002, 1052
- 8. 1154
- 9. 1012, 1162
- 10. 1252, 1352, 1452, 1552, 1314, 1464
- 11. 1652, 1702
- 12. 1612, 1762

Dimensions/clearances

30XW-/30XWH- 254-852

30XW-P/30XWHP 512-862

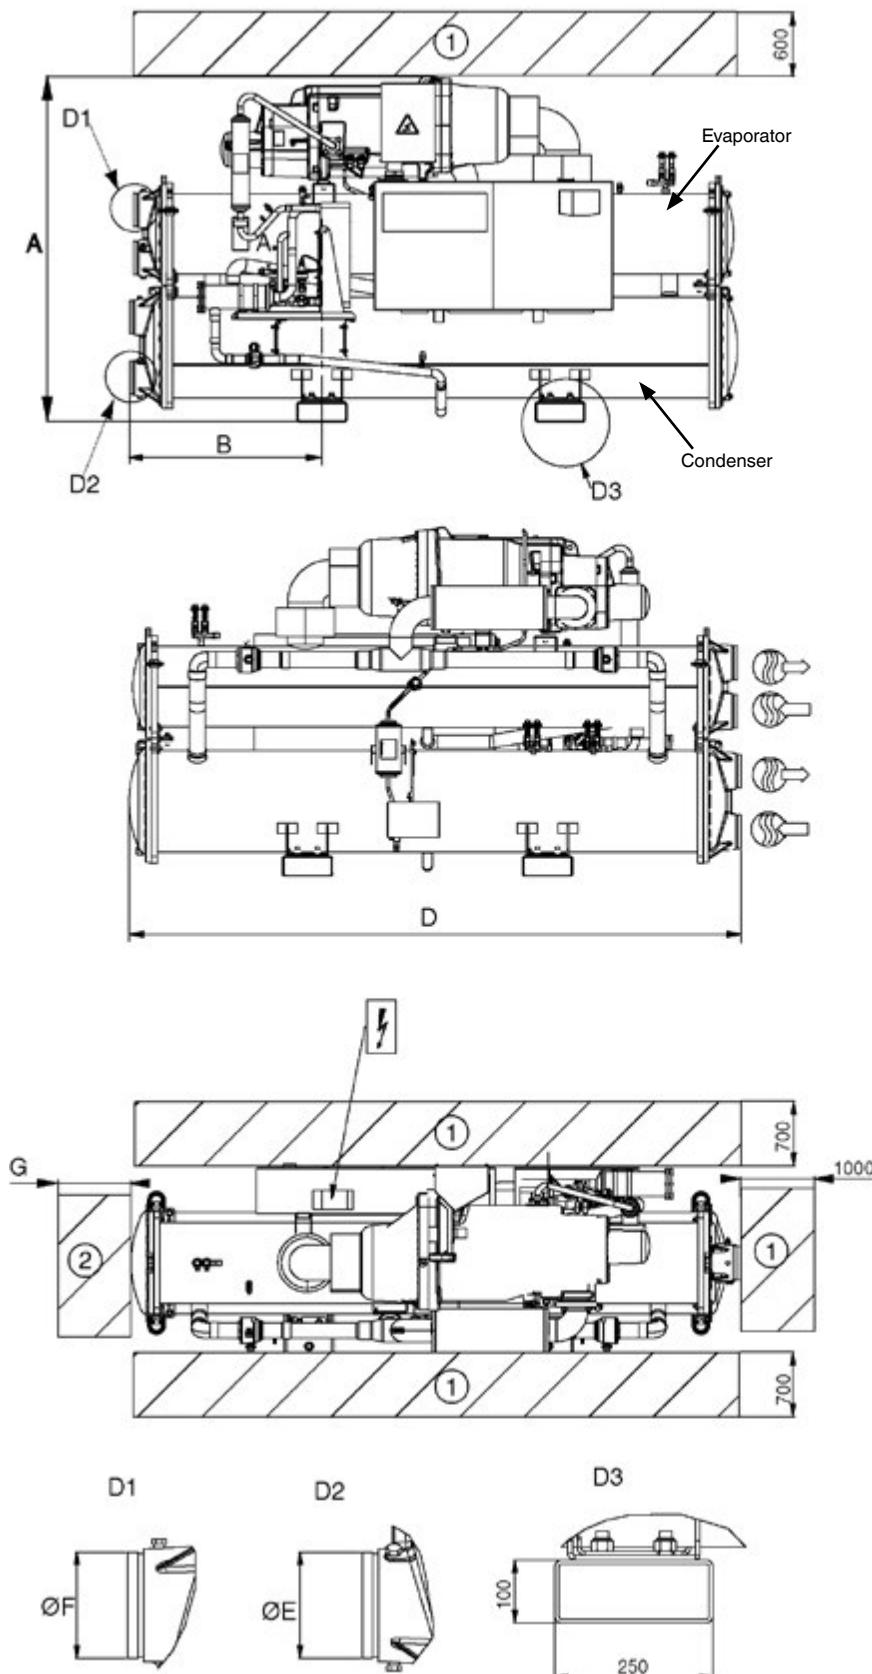

NOTE: Drawings are not contractually binding. Before designing an installation, consult the certified dimensional drawings, available on request.

	A	B	C	D	E	F	G
Standard-efficiency units 30XW-/30XWH-							
254	1567	800	928	2724	141.3	141.3	2600
304	1567	800	928	2724	141.3	141.3	2600
354	1567	800	928	2724	141.3	141.3	2600
402	1693	810	936	2742	141.3	141.3	2600
452	1693	810	936	2742	141.3	141.3	2600
552	1693	810	936	2742	141.3	141.3	2600
602	1693	810	936	2742	141.3	141.3	2600
652	1848	968	1044	3059	168.3	168.3	2800
702	1848	968	1044	3059	168.3	168.3	2800
802	1848	968	1044	3059	168.3	168.3	2800
852	1898	828	1044	2780	219.1	168.3	2600
High-efficiency units 30XW-P/30XWHP							
512	1743	968	936	3059	168.3	168.3	2800
562	1743	968	936	3059	168.3	168.3	2800
712	1950	1083	1065	3290	219.1	219.1	3100
812	1950	1083	1070	3290	219.1	219.1	3100
862	1950	1083	1070	3290	219.1	219.1	3100
Standard-efficiency units 30XW-/30XWH- (option 150)							
254	1567	800	928	2724	141.3	141.3	2600
304	1567	800	928	2724	141.3	141.3	2600
354	1567	800	928	2724	141.3	141.3	2600
402	1693	810	936	2742	141.3	141.3	2600
452	1693	810	936	2742	141.3	141.3	2600
552	1693	810	936	2742	141.3	141.3	2600
602	1693	810	936	2742	141.3	141.3	2600
652	1868	968	1090	3059	168.3	168.3	2800
702	1868	968	1090	3059	168.3	168.3	2800
802	1868	968	1090	3059	168.3	168.3	2800
852	1920	828	1090	2780	168.3	219.1	2600
High-efficiency units 30XW-P/30XWHP (option 150)							
512	1743	968	936	3059	168.3	168.3	2800
562	1743	968	936	3059	168.3	168.3	2800
712	1970	1083	1105	3290	219.1	219.1	3100
812	1970	1083	1105	3290	219.1	219.1	3100
862	1970	1083	1105	3290	219.1	219.1	3100

Legend:

All dimensions are in mm.

(1) Required clearance for maintenance

(2) Recommended clearance for tube removal





Water inlet

Water outlet

Power supply connection




Dimensions/clearances

30XW--/30XWH- 1002-1552
30XW-P/30XWHP 1012-1464

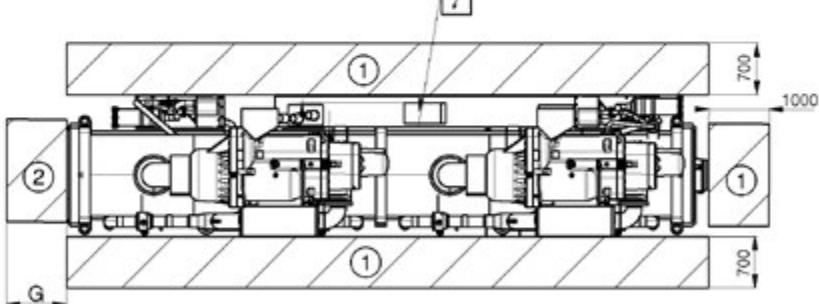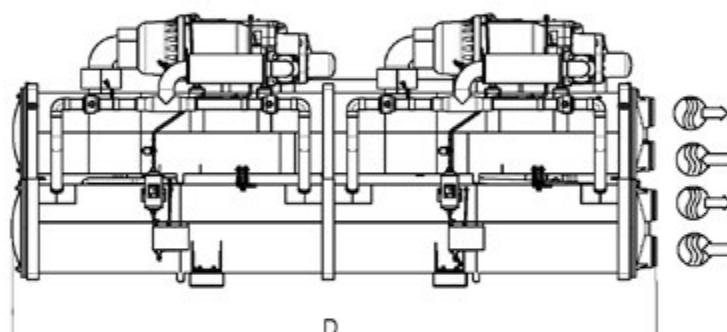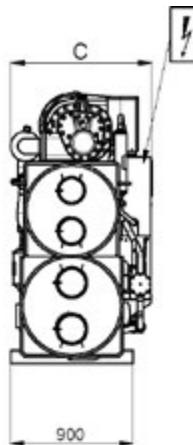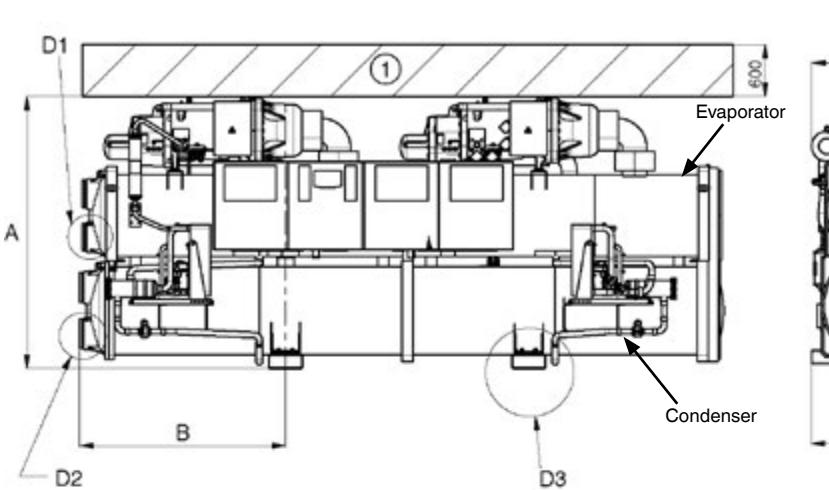

Dimensions in mm						
A	B	C	D	E	F	G
Standard-efficiency units 30XW--/30XWH-						
1002	1870	950	1036	4025	219.1	168.3 3800
1052	1870	950	1036	4025	219.1	168.3 3800
1152	1925	950	1036	4025	219.1	219.1 3800
1252	2051	1512	1162	4730	219.1	219.1 4500
1352	2051	1512	1162	4730	219.1	219.1 4500
1452	2051	1512	1162	4730	219.1	219.1 4500
1552	2051	1512	1162	4730	219.1	219.1 4500
High-efficiency units 30XW-P/30XWHP						
1012	1997	1512	1039	4730	219.1	219.1 4500
1162	1997	1512	1039	4730	219.1	219.1 4500
1314	2051	1512	1162	4730	219.1	219.1 4500
1464	2051	1512	1162	4730	219.1	219.1 4500
Standard-efficiency units 30XW--/30XWH- (option 150)						
1002	1870	950	1036	4025	219.1	168.3 3800
1052	1870	950	1036	4025	219.1	168.3 3800
1154	2925	950	1036	4025	219.1	219.1 3800
1252	2071	1512	1202	4730	219.1	219.1 4500
1352	2071	1512	1202	4730	219.1	219.1 4500
1452	2071	1512	1202	4730	219.1	219.1 4500
1552	2071	1512	1202	4730	219.1	219.1 4500
High-efficiency units 30XW-P/30XWHP (option 150)						
1012	1997	1512	1039	4730	219.1	219.1 4500
1162	1997	1512	1039	4730	219.1	219.1 4500
1314	2071	1512	1202	4730	219.1	219.1 4500
1464	2071	1512	1202	4730	219.1	219.1 4500

D1 D2 D3



Legend:

All dimensions are in mm.


- (1) Required clearance for maintenance
- (2) Recommended clearance for tube removal
- Water inlet
- Water outlet
- Power supply connection

NOTE: Drawings are not contractually binding. Before designing an installation, consult the certified dimensional drawings, available on request.

Dimensions/clearances

30XW-/30XWH- 1652-1702

30XW-P/30XWHP 1612-1762

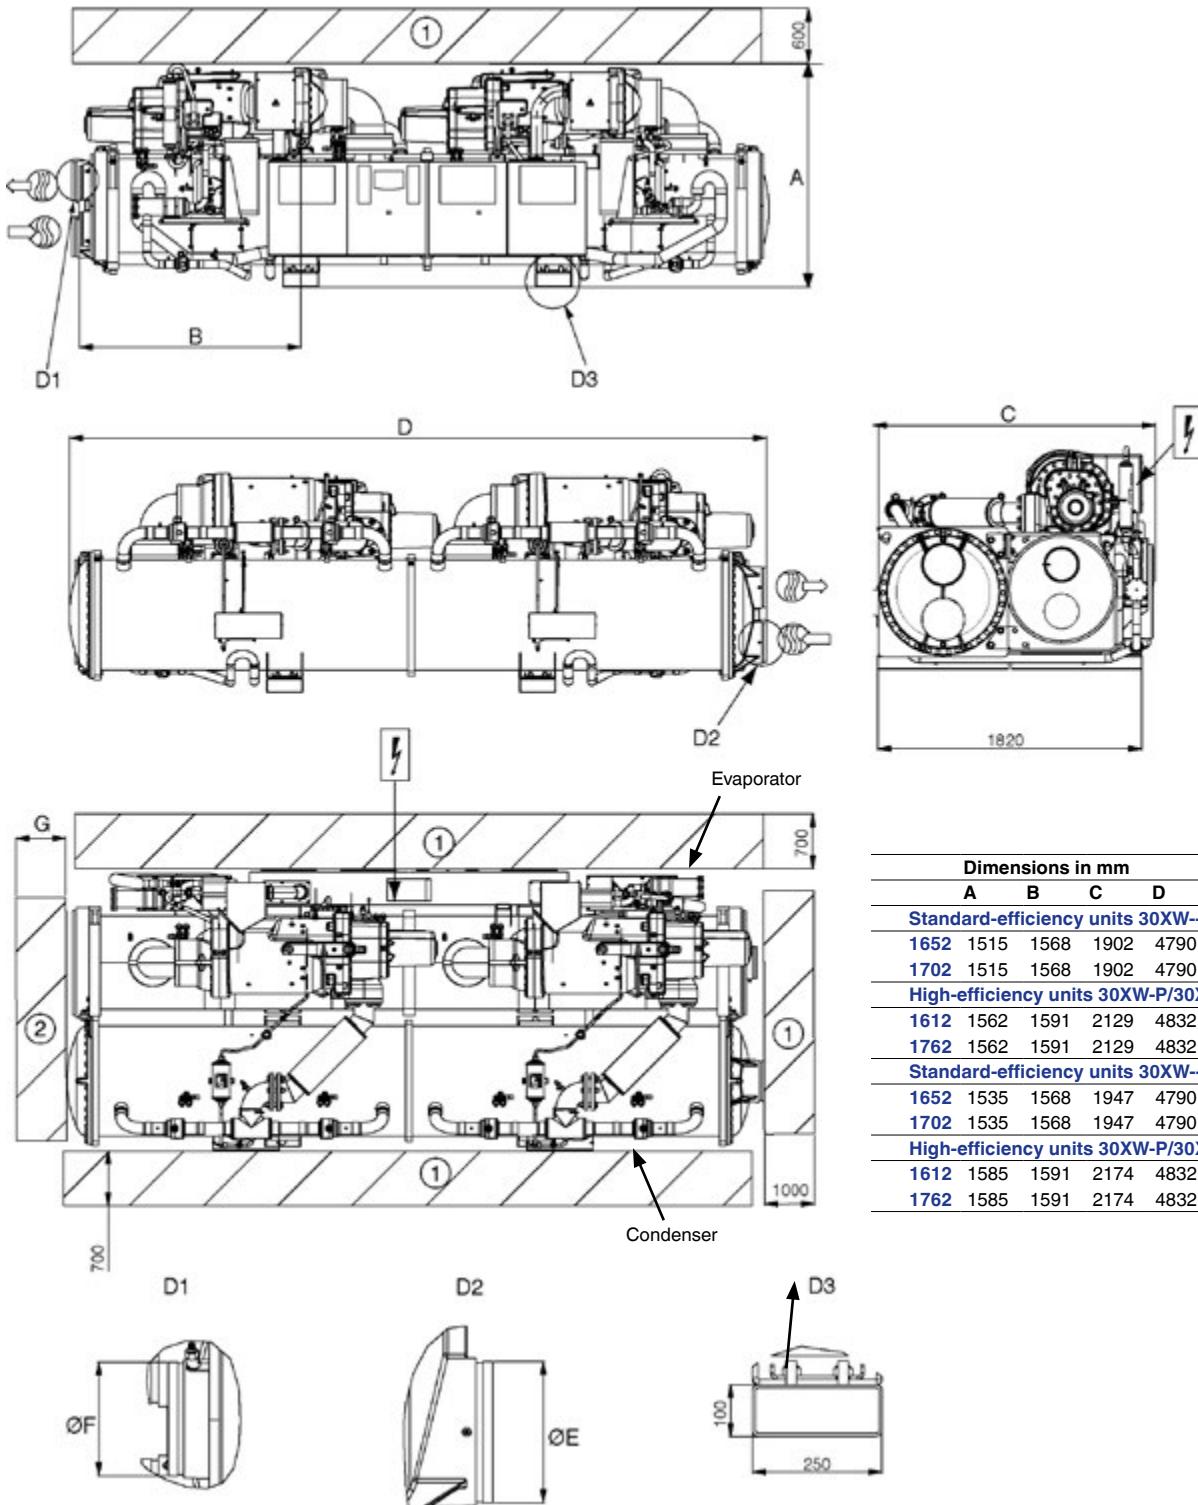

Dimensions in mm

A	B	C	D	E	F	G
Standard-efficiency units 30XW-/30XWH-						
1652	1515	1568	1902	4790	219.1	219.1
1702	1515	1568	1902	4790	219.1	219.1
High-efficiency units 30XW-P/30XWHP						
1612	1562	1591	2129	4832	273.1	273.1
1762	1562	1591	2129	4832	273.1	273.1
Standard-efficiency units 30XW-/30XWH- (option 150)						
1652	1535	1568	1947	4790	219.1	219.1
1702	1535	1568	1947	4790	219.1	219.1
High-efficiency units 30XW-P/30XWHP (option 150)						
1612	1585	1591	2174	4832	273.1	273.1
1762	1585	1591	2174	4832	273.1	273.1

Legend:

All dimensions are in mm.

(1) Required clearance for maintenance

(2) Recommended clearance for tube removal

Water inlet

Water outlet

Power supply connection

NOTE: Drawings are not contractually binding. Before designing an installation, consult the certified dimensional drawings, available on request.

Specification Guide

General description

(30XW / 30XWP) Factory assembled single piece water-cooled chiller, shall include all factory wiring, piping, controls, refrigerant charge (HFC-134a), refrigeration circuits, screw compressors, electronic expansion valves and equipment required prior to field start-up.

(30XWH / 30XWHP) Factory assembled single piece water-sourced heat pump, shall include all factory wiring, piping, controls, refrigerant charge (HFC-134a), refrigeration circuits, screw compressors, electronic expansion valves and equipment required prior to field start-up.

Quality assurance

Unit construction shall comply with European directives:

- Pressurized equipment directive (PED) 97/23/EC
 - Machinery directive 2006/42/EC, modified
 - Low voltage directive 2006/95/EC, modified
 - Electromagnetic compatibility directive 2004/108/EC, modified, and the applicable recommendations of European standards
 - Machine safety: electrical equipment in machines, general requirements, EN 60204-1
 - Electromagnetic compatibility emission EN61000-6-4
 - Electromagnetic compatibility immunity EN61000-6-2
- Unit shall be designed, manufactured and tested in a facility with a quality management system certified ISO 9001 and environmental management system ISO 14001. Unit shall be run tested at the factory.

Design performance data

- Cooling capacity (kW):
- Unit power input (kW):
- Full load energy efficiency, EER (kW/kW):
- Eurovent Class
- Part load energy efficiency, ESEER (kW/kW):
- Evaporator entering/leaving water temperature (°C): ... /
- Fluid type:
- Fluid flow rate (l/s):
- Evaporator pressure drops (kPa):
- Condenser entering/leaving water temperature (°C):
- Fluid type:
- Fluid flow rate (l/s):
- Condenser pressure drops (kPa):
- Sound power level at full load (dB(A)):
- Dimensions, length x depth x height (mm): ... x ... x

Performance shall be declared in accordance with EN14511-3:2013 and certified by Eurovent up to 1500 kW.

The unit shall be capable of starting with 13 °C entering water temperature to the condenser with condenser head pressure control option. The unit shall be capable of starting with 35 °C entering water temperature to the evaporator.

The machine shall operate with condenser leaving water temperature up to 50 °C.

- (*Carrier option 150*) The machine shall operate with condenser leaving water temperature up to 63 °C.
- (*Carrier option 5*) The unit shall permit chilled brine solution production down to -6 °C when ethylene glycol is used, or down to -3°C when propylene glycol is used.
- (*Carrier option 6*) The unit shall permit chilled brine solution production down to -12 °C when ethylene glycol is used, or down to -8 °C when propylene glycol is used.

Frame

- Machine frame shall include heat exchangers and compressors in a self-supporting structure
- Electrical panel doors shall be accessible by 1/4-turn screws

Compressor

- Unit shall have semi-hermetic twin-screw compressors with internal relief valve and check valve to avoid reverse rotation on shut down
- Each compressor shall be equipped with a discharge shut-off valve
- The discharge shall also be equipped with a muffler to reduce discharge gas pulsations
- Compressor bearings shall be designed for minimum 73000 hours at maximum operating conditions
- Capacity control shall be provided by a slide valve
- Compressor capacity control shall be stepless from 100% to 15% load
- Compressor shall start in unloaded condition
- Motor shall be cooled by suction gas and protected through a dedicated electronic board against the following: thermal overload by internal winding temperature sensors, electrical overload and short circuit by dedicated fuses (one per phase), reverse rotation, loss of phase, undervoltage and power supply failure
- Lubrication oil system shall include pre-filter and external filter capable of filtration to 5 microns
- The oil filter line shall be equipped with service shut off valves for easy filter replacement
- The oil separator, shall be integrated in the condenser design and shall not require oil pump
- The oil separator shall include an oil level safety switch.

Evaporator

- Unit shall be equipped with a single flooded evaporator
- Evaporator shall be manufactured by the chiller manufacturer
- Evaporator shall be tested and stamped in accordance with the European directive for pressurized equipment 97/23/EC
- The maximum refrigerant-side operating pressure will be 2100 kPa, and the maximum waterside pressure will be 1000 kPa (2100kPa as an option)
- The evaporator shall be mechanically cleanable, shell-and-tube type with removable heads
- Tubes shall be internally and externally grooved, seamless-copper, and shall be rolled into tube sheets
- Shell shall be insulated with 19 mm closed-cell foam with a maximum K factor of 0.28. Evaporator thermal insulation shall be factory fitted
- The evaporator shall have a drain and vent in each head
- Chiller shall have only one water inlet & outlet connection with Victaulic couplings to avoid vibrations transmission and to accommodate minor pipework misalignment (Victaulic adapter kit shall be available on demand)
- The evaporator shall incorporate an indirect refrigerant level control system (based on the continuous measurement of the approach value) to ensure optimum heat transfer performance under all load conditions
- Design shall incorporate either 1 or 2 independent refrigerant circuits
- Evaporator shall be fitted with electronic auto setting water flow switch. Paddle switches or differential pressure switches shall not be acceptable.

Condenser

- Unit shall be equipped with a single condenser
- Condenser shall be manufactured by the chiller manufacturer
- Condenser shall be tested and stamped in accordance with the European directive for pressurized equipment 97/23/EC
- Single pass or 2-passes design shall be possible
- The maximum refrigerant-side operating pressure will be 2100 kPa, and the maximum waterside pressure will be 1000 kPa (2100kPa as an option)
- The condenser shall be mechanically cleanable shell-and-tube type with removable heads
- Tubes shall be internally and externally grooved, seamless-copper, and shall be rolled into tube sheets
- The condenser shall have a drain and vent in each head
- Chiller shall have only one water inlet & outlet connection with Victaulic couplings to avoid vibrations transmission and to accommodate minor pipework misalignment (Victaulic adapter kit shall be available on demand)
- Design shall incorporate either 1 or 2 independent refrigerant circuits and the oil separator.

Refrigerant circuit

- Refrigerant circuit components shall include: compressor, oil separator, high and low side pressure relief devices, economizer, filter driers, moisture indicating sight glasses, long stroke electronic expansion device, and complete operating charge of both refrigerant R134a and compressor oil
- (*Carrier option 92*) A compressor suction and discharge line shut off valve, an evaporator inlet valve and economizer line valve, shall be mounted to isolate all main components (filter drier, oil filter, expansion device and compressor) and allow refrigerant to be safely stored during service operation
- (*Carrier option 257*) Evaporator and refrigerant gas suction line shall be acoustically insulated.

Power control box

- Unit shall operate at 400 Volts (+/- 10%), 3-phases, 50 Hertz power supply without neutral
- Unit shall be designed for simplified connection on TN(s) networks
- Control circuit voltage shall be 24 V maximum, supplied by a factory-installed transformer
- Unit shall be supplied with factory-installed main circuit breaker/isolator
- Unit shall have single point power connection (*Carrier option 81* for sizes 1002/1762)
- Unit shall have a factory installed star/delta starter as standard to limit electrical inrush current
- Power control box is powered painted with hinged and gasket sealed doors and is protected to IP23.

Controls

- Unit control shall include as a minimum: microprocessor with non-volatile memory, picture guided unit/operator interface, the LOCAL/OFF/ REMOTE/CCN selector and a 5 inches coloured touch-screen display with multiple language capability
- Pressure sensors shall be installed to measure suction, discharge, and oil pressure
- Temperature probes shall be installed to read cooler/ condenser entering and leaving temperatures.

- (*Carrier option 158A*) Unit control shall include as a minimum: microprocessor with non-volatile memory, picture guided unit/operator interface, the LOCAL/OFF/REMOTE/CCN selector and a 7 inches coloured touch-screen display with multiple language capability
- Unit control shall have an IP port to permit user connection via web browser, allowing same level of access to control menus as unit mounted interface (excluding start/stop and alarm reset capabilities)
- Control shall store technical documentation, drawings and spare parts list specific to each particular unit
- (*Carrier option 148B*) A two-directional communication board shall allows plug and play interfacing of the machine with any BMS using the J-Bus protocol
- (*Carrier option 148D*) A two-directional communication board shall allows plug and play interfacing of the machine with any BMS using the LonTalk protocol
- (*Carrier option 149*) Machine shall be supplied with factory-installed two-directional high-speed communication using BACnet protocol over Ethernet network (IP-connection). The BACnet over-IP communication shall have no limitation in reading/writing controller points and shall use standardized alarm codes as defined with BACnet protocol. Filed programming shall be required.
- (*Carrier option 298*) Machine shall be accessible via wireless connection for remote monitoring with the scope of preventive maintenance.

Unit shall be capable of performing the following functions:

- Electronic expansion valve control optimizing evaporator refrigerant charge while ensuring minimum refrigerant superheat and optimum subcooling at condenser outlet
- Capacity control based on leaving chilled fluid temperature
- Limitation of the chilled fluid-temperature pull-down rate at start-up to an adjustable range of 0.1°C to 1.1°C per minute to prevent excessive demand spikes at start-up
- Automatic change-over and cycling of compressors to equalize running hours and number of starts
- Reset enable of leaving chilled-water temperature based on the outdoor air temperature or via 0-10 V signal (as option)
- Dual set point management for the leaving chilled water temperature activated by a remote contact closure signal or by the built in time clock
- 2-level demand limit control (between 0 and 100%) activated by remote contact closure or by the built in time clock
- Time scheduling management to enable unit start-up control, demand limit and set-point changes
- Trending of main variables
- (*Carrier option 58*) lead/lag type control of two chillers running in series or parallel
- (*Carrier option 84*) Water pump control, safety pumps (if installed) on both condenser and cooler side

- (*Carrier option 156*) The following inputs contacts shall be available on the unit control board:
 - Setpoint reset by indoor air temperature sensor
 - Cooling setpoint reset by 4-20 mA
 - Time schedule override
 - Ice storage input
 - Demand limit
 - Unit shut down

The following outputs contacts shall be available on the unit control board:

- Instantaneous chiller capacity by 0-10 V signal
- Complete shut-down due to a chiller fault
- Compressor operation indication.

Diagnosis

- Control interface shall be capable of displaying set points, system status including temperatures, pressures, current for each compressor, run time and percent loading
- Control interface shall perform trending of up to 10 preselected variables
- Control system shall allow a quick test of all machine elements to verify the correct operation of every switch, circuit breaker, contactor etc. before the chiller is started
- In case of alarm, control system shall send an email to specific mail box set by user during machine commissioning
- Control shall have black box function which permit to store data set of 20 variables with interval of 5 seconds, during 14 minutes preceding the alarm and 1 minute following the alarm event. The black box recording capability shall permit recording for 20 events and once the threshold is reached new data shall over-write the oldest ones.

Safeties

Control system shall provide the unit with protection against the following:

- Reverse rotation
 - Low chilled water temperature
 - Low oil pressure (per compressor)
 - Current imbalance
 - Compressor thermal overload
 - High pressure (with automatic compressor unloading in case of excessive condensing temperature)
 - Electrical overload and short circuit
 - Loss of phase, undervoltage and power supply failure
- Control shall provide separate general alert (minor incident) and alarm (circuit down) remote indication.



Order No.13457-20, 03.2017. Supersedes order No. 13457-20, 05.2015.

Manufacturer reserves the right to change any product specifications without notice.



ISO9001 • ISO14001

Quality and Environment
Management Systems
Approval

Manufactured by: Carrier SCS, Montluel, France.
Printed in the European Union.